

FIELD OF THE INVENTION AND RELATED ART

Referring to the figures, the EL device generally has a structure including a transparent substrate 15, a transparent electrode 14 disposed on the transparent substrate 15, a metal electrode 11 disposed opposite to the transparent electrode 14, and a plurality of organic (compound) layers disposed

between the transparent electrode 14 and the metal electrode 11.

Referring to Figure 1, the EL device in this embodiment has two organic layers including a
5 luminescence layer 12 and a hole transport layer 13.

The transparent electrode 14 may be formed of a film of ITO (indium tin oxide) having a larger work function to ensure a good hole injection performance into the hole transport layer. On the other hand, the
10 metal electrode 11 may be formed of a layer of aluminum, magnesium, alloys thereof, etc., having a smaller work function to ensure a good electron injection performance into the organic layer(s).

These (transparent and metal) electrodes 14
15 and 11 may be formed in a thickness of 50 - 200 nm.

The luminescence layer 12 may be formed of, e.g., aluminum quinolinol complex (representative example thereof may include Alq3 described hereinafter) having an electron transporting
20 characteristic and a luminescent characteristic. The hole transport layer 13 may be formed of, e.g., triphenyldiamine derivative (representative example thereof may include α -NPD described hereinafter) having an electron donating characteristic.

25 The above-described EL device exhibits a rectification characteristic, so that when an electric field is applied between the metal electrode 11 as a

05064075.02404
F04250.5209550

cathode and the transparent electrode 14 as an anode, electrons are injected from the metal electrode 11 into the luminescence layer 12 and holes are injected from the transparent electrodes 14.

5 The thus-injected holes and electrons are recombined within the luminescence layer 12 to produce excitons, thus causing luminescence. At that time, the hole transport layer 13 functions as an electron-blocking layer to increase a recombination efficiency at the boundary between the luminescence layer 12 and the hole transport layer 13, thus enhancing a luminescence efficiency.

Referring to Figure 1B, in addition to the layers shown in Figure 1A, an electron transport layer 16 is disposed between the metal electrode 11 and the luminescence layer 12, whereby an effective carrier blocking performance can be ensured by separating functions of luminescence, electron transport and hole transport, thus allowing effective luminescence.

20 The electron transport layer 16 may be formed
of, e.g., oxadiazole derivatives.

In ordinary organic EL devices, fluorescence caused during a transition of luminescent center molecule from a singlet excited state to a ground state is used as luminescence.


On the other hand, not the above fluorescence (luminescence) via singlet exciton, phosphorescence

(luminescence) via triplet exciton has been studied for use in organic EL device as described in, e.g., "Improved energy transfer in electrophosphorescent device" (D.F. O'Brien et al., Applied Physics Letters, Vol. 74, No. 3, pp. 442 - 444 (1999)) and "Very high-efficiency green organic light-emitting devices based on electrophosphorescence" (M.A. Baldo et al., Applied Physics Letters, Vol. 75, No. 1, pp. 4 - 6 (1999)).


The EL devices shown in these documents may generally have a sectional structure shown in Figure 1C.

Referring to Figure 1C, four organic layers including a hole transfer layer 13, a luminescence layer 12, an exciton diffusion-prevention layer 17, and an electron transport layer 16 are successively formed in this order on the transparent electrode (anode) 14.


In the above documents, higher efficiencies have been achieved by using four organic layers including a hole transport layer 13 of α -NPD (shown below), an electron transport layer 16 of Alq3 (shown below), an exciton diffusion-prevention layer 17 of BPC (shown below), and a luminescence layer 12 of a mixture of CPB (shown below) as a host material with Ir(ppy)₃ (shown below) or PtOEP (shown below) as a guest phosphorescence material doped into CBP at a concentration of ca. 6 wt. %.

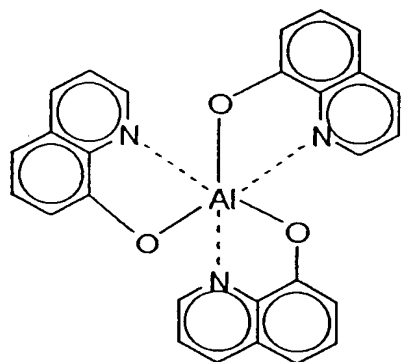


Alq3

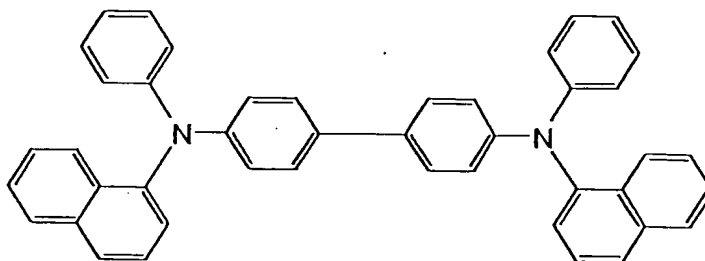


α -NPD

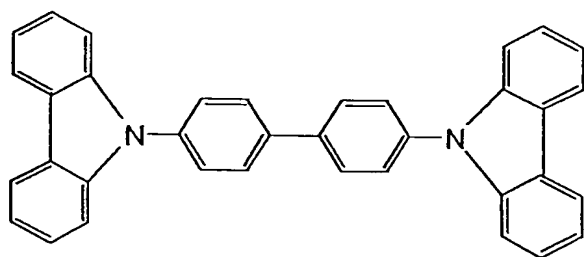


CBP

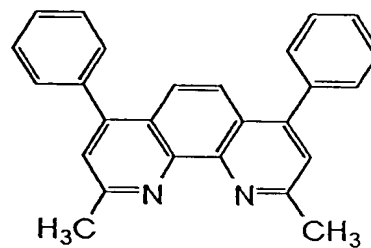

BCP

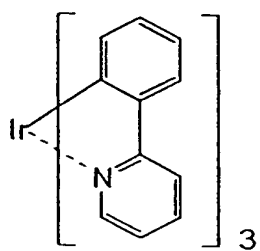

Ir(ppy)₃

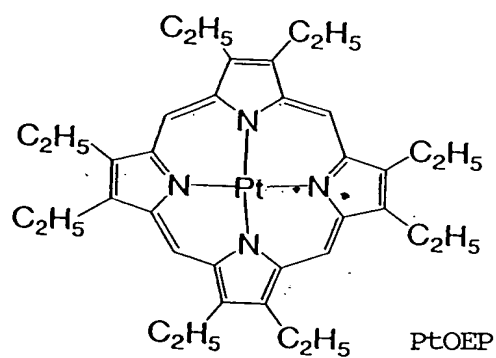

PtOEP

Alq3: tris(8-hydroxyquinoline) aluminum
(aluminum-quinolinol complex),

α -NPD: N4,N4'-di-naphthalene-1-yl-N4,N4'-
diphenyl-biphenyl-4,4'-diamine (4,4'-bis[N-(1-
5 naphthyl)-N-phenyl-amino]biphenyl),

CBP: 4,4'-N,N'-dicarbazole-biphenyl,

BCP: 2,9-dimethyl-4,7-diphenyl-1,10-phenan-
throlene,

Ir(ppy)₃: fac tris(2-phenylpyridine)iridium
10 (iridium-phenylpyridine complex), and

PtEOP: 2,3,7,8,12,13,17,18-octaethyl-21H,23H-
porphine platinum (platinum-octaethyl porphine
complex).

The phosphorescence (luminescence) material
15 used in the luminescence layer 12 has attracted
notice. This is because the phosphorescence material
is expected to provide a higher luminescence
efficiency in principle.

More specifically, in the case of the
20 phosphorescence material, excitons produced by
recombination of carriers comprise singlet excitons
and triplet excitons presented in a ratio of 1:3. For
this reason, when fluorescence caused during the
transition from the singlet excited state to the
25 ground state is utilized, a resultant luminescence
efficiency is 25 % (as upper limit) based on all the
produced excitons in principle.

On the other hand, in the case of utilizing phosphorescence caused during transition from the triplet excited state, a resultant luminescence efficiency is expected to be at least three times that of the case of fluorescence in principle. In addition thereto, if intersystem crossing from the singlet excited state (higher energy level) to the triplet excited state is taken into consideration, the luminescence efficiency of phosphorescence can be expected to be 100 % (four times that of fluorescence) in principle.

The use of phosphorescence based on transition from the triplet excited state has also been proposed in, e.g., Japanese Laid-Open Patent Application (JP-A) 11-329739, JP-A 11-256148 and JP-A 8-319482.

An iridium-phenylpyrimidine complex having a methyl substituent has been described in "Preprint for the 61-th Academical Lecture of the Applied Physics Society of Japan", the third volume, P.1117, 6p-ZH-1 (2000) ("Document 1"). Further, an iridium-phenylpyrimidine complex having 4-, 5-fluorine substituents (herein, referred to as a "metal coordination compound A" has been described in "Polymer Preprints", 41(1), pp. 770 - 771 (2000) ("Document 2").

However, the above-mentioned organic EL

devices utilizing phosphorescence have accompanied with a problem of luminescent deterioration particularly in an energized state.

5 The reason for luminescent deterioration has not been clarified as yet but may be attributable to such a phenomenon that the life of triplet exciton is generally longer than that of singlet exciton by at least three digits, so that molecule is placed in a higher-energy state for a long period to cause
10 reaction with ambient substance, formation of exciplex or excimer, change in minute molecular structure, structural change of ambient substance, etc.

Accordingly, the (electro)phosphorescence EL device is expected to provide a higher luminescence
15 efficiency as described above, while the EL device is required to suppress or minimize the luminescent deterioration in energized state.

SUMMARY OF THE INVENTION

20 An object of the present invention is to provide a luminescence device capable of providing a high-efficiency luminescent state at a high brightness (or luminance) for a long period while minimizing the deterioration in luminescence in energized state.


25 Herein, although evaluation criteria for "high efficiency" and "high brightness (luminance) for a long period" may vary depending on luminescent

performances required for an objective luminescence device (EL device), for example, a luminescence efficiency of at least 1 cd/W based on an inputted current value may be evaluated as "high efficiency".

5 Further, a luminance half-life of, e.g., at least 500 hours at the time of luminescence at an initial luminance of 100 cd/m² may be evaluated as "high brightness (luminance) for a long period" or a smaller luminance deterioration in energized state.

10 Another object of the present invention is to provide a metal coordination compound as a material suitable for an organic layer for the luminescence device.

15 According to the present invention, there is provided a luminescence device, comprising: an organic compound layer comprising a metal coordination compound represented by the following formula (1):

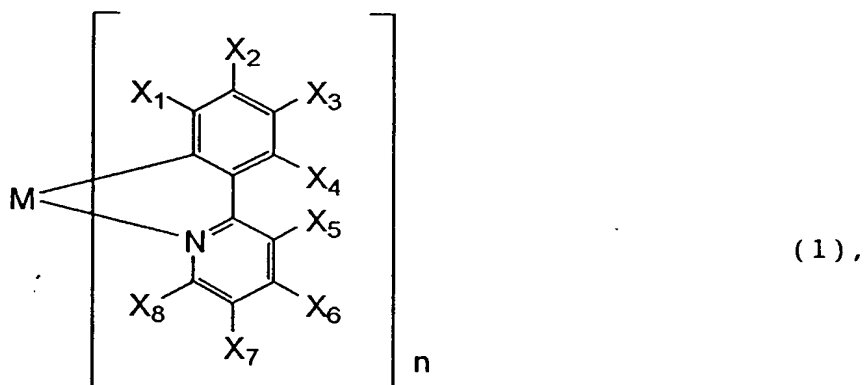


25

wherein M denotes Ir, Rh or Pd; n is 2 or 3; and X1 to X8 independently denote hydrogen atom or a substituent

selected from the group consisting of halogen atom;
 nitro group; trifluoromethyl group; trialkylsilyl
 group having three linear or branched alkyl groups
 each independently having 1 - 8 carbon atoms; and a
 5 linear or branched alkyl group having 2 - 20 carbon
 atoms capable of including one or at least two non-
 neighboring methylene groups which can be replaced
 with -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- or -C≡C-
 and capable of including hydrogen atom which can be
 10 replaced with fluorine atom; with the proviso that at
 least one of X1 to X8 is a substituent other than
 hydrogen atom, and X2 and X3 cannot be fluorine atom
 at the same time.

According to the present invention, there is
 15 also provided a metal coordination compound, adapted
 for use in a luminescence device, represented by the
 following formula (1):

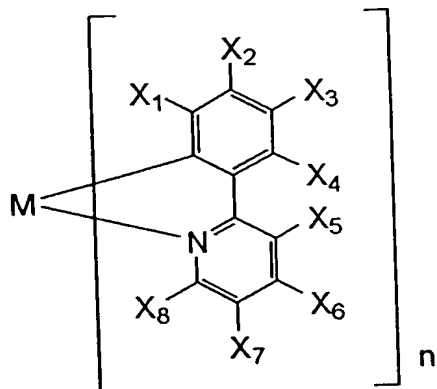


(1),

wherein M denotes Ir, Rh or Pd; n is 2 or 3; and X1 to
 X8 independently denote hydrogen atom or a substituent

selected from the group consisting of halogen atom;
 nitro group; trifluoromethyl group trialkylsilyl group
 having three linear or branched alkyl groups each
 independently having 1 - 8 carbon atoms; and a linear
 5 or branched alkyl group having 2 - 20 carbon atoms
 capable of including one or at least two non-
 neighboring methylene groups which can be replaced
 with -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- or -C≡C-
 and capable of including hydrogen atom which can be
 10 replaced with fluorine atom; with the proviso that at
 least one of X1 to X8 is a substituent other than
 hydrogen atom, and X2 and X3 cannot be fluorine atom
 at the same time.


The present invention provides a luminescence
 15 device, comprising: an organic compound layer
 comprising a metal coordination compound represented
 by the following formula (2):

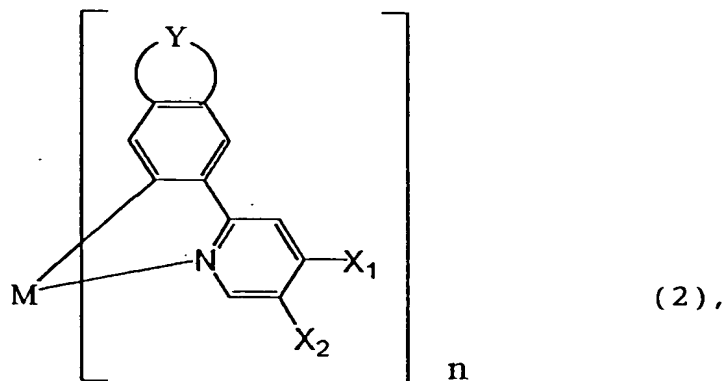

wherein M denotes Ir, Rh or Pd; n is 2 or 3; Y denotes
 an alkylene group having 2 - 4 carbon atoms capable of

including one or at least two non-neighboring methylene groups which can be replaced with -O-, -S- or -CO- and capable of including hydrogen atom which can be replaced with a linear or branched alkyl group having 1 - 10 carbon atoms; and X1 and X2 independently denote hydrogen atom; halogen atom; nitro group; trialkylsilyl group having 1 - 8 carbon atoms; or a linear or branched alkyl group having 1 - 20 carbon atoms capable of including one or at least two non-neighboring methylene groups which can be replaced with -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- or -C≡C- and capable of including hydrogen atom which can be replaced with fluorine atom.

The present invention also provides a metal coordination compound, adapted for use in a luminescence device, represented by the following formula (2):

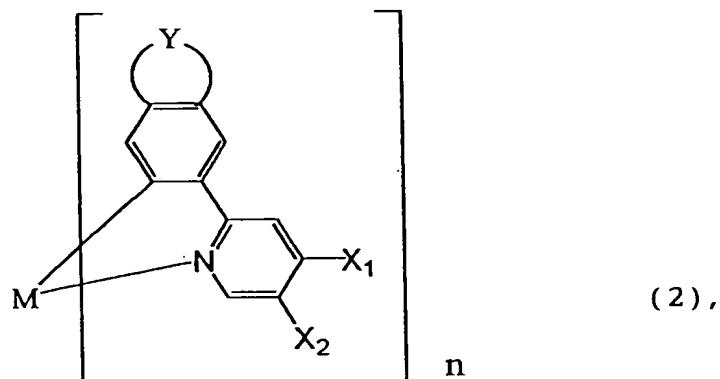

wherein M denotes Ir, Rh or Pd; n is 2 or 3; Y denotes an alkylene group having 2 - 4 carbon atoms capable of

including one or at least two non-neighboring methylene groups which can be replaced with -O-, -S- or -CO- and capable of including hydrogen atom which can be replaced with a linear or branched alkyl group having 1 - 10 carbon atoms; and X1 and X2 independently denote hydrogen atom; halogen atom; nitro group; trialkylsilyl group having 1 - 8 carbon atoms; or a linear or branched alkyl group having 1 - 20 carbon atoms capable of including one or at least two non-neighboring methylene groups which can be replaced with -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- or -C≡C- and capable of including hydrogen atom which can be replaced with fluorine atom.

The present invention further provides a display apparatus including the above-mentioned luminescence device and drive means for driving the luminescence device.

These and other objects, features and advantages of the present invention will become more apparent upon a consideration of the following description of the preferred embodiments of the present invention taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1A, 1B and 1C are respectively a schematic sectional view of a layer structure of a

luminescence device.

Figure 2 is a graph showing a relationship between a Hammett's substitution constant σ and a peak (maximum) emission wavelength λ_{PE} .

5

DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the case where a luminescence layer for an organic EL device is formed of a carrier transporting host material and a phosphorescent guest material, a process of emission of light (phosphorescence) may generally involve the following steps:

- (1) transport of electron and hole within a luminescence layer,
- (2) formation of exciton of the host material,
- 15 (3) transmission of excited energy between host material molecules,
- (4) transmission of excited energy from the host material molecule to the guest material molecule,
- (5) formation of triplet exciton of the guest material, and
- 20 (6) emission of light (phosphorescence) caused during transition from the triplet excited state to the ground state of the guest material.

In the above steps, desired energy transmission and luminescence may generally be caused based on various quenching and competition.

In order to improve a luminescence efficiency

of the EL device, a luminescence center material per se is required to provide a higher yield of luminescence quantum. In addition thereto, an efficient energy transfer between host material molecules and/or between host material molecule and guest material molecule is also an important factor.

Further, the above-described luminescent deterioration in energized state may presumably relate to the luminescent center material per se or an environmental change thereof by its ambient molecular structure.

For this reason, our research group has extensively investigated an effect of use of various metal coordination compounds as the luminescent center material and as a result, has found that the metal coordination compound represented by the above-mentioned formula (1) or (2) allows a high-efficiency luminescence with a high brightness (luminance) for a long period (i.e., a decreased luminescent deterioration in energized state).

The metal coordination compound of formula (1) may preferably have substituents X1 to X8 in which at least two of X1 to X8 are substituents other than hydrogen atom. Further, in the formula (1), at least one of X5 to X8 may preferably be a substituent other than hydrogen atom and/or at least two of X1 to X4 may preferably be substituents other than hydrogen atom.

The metal coordination compound represented by the formulas (1) causes phosphorescence (luminescence) and is assumed to have a lowest excited state comprising a triplet excited state liable to cause metal-to-ligand charge transfer (MLCT* state). The phosphorescent emission of light (phosphorescence) is produced during the transition from the MLCT* state to the ground state.

The metal coordination compound of formula (1) according to the present invention has been found to provide a higher phosphorescence yield of 0.1 - 0.9 and a shorter phosphorescence life of 1 - 60 μ sec.

A phosphorescence yield (P(m)) is obtained based on the following equation:

$$P(m)/P(s) = (S(m)/S(s)) \times (A(s)/A(m)),$$
 wherein P(m) represents a phosphorescence yield of an (unknown) objective luminescent material, P(s) represents a known (standard) phosphorescence yield of standard luminescent material (Ir(ppy)₃), S(m) represents an integrated intensity of (photo-)excited emission spectrum of the objective material, S(s) represents a known integrated intensity of the standard material, A(m) represents an absorption spectrum of an excited light wavelength of the objective material, and A(s) represents a known absorption spectrum of the standard material.

The shorter phosphorescence life is necessary


5

10

15

25

of substituents X2, X3 and X4 with respect to carbon atom connected to iridium of an iridium complex (metal coordination compound) shown below and peak emission wavelengths λ_{PE} in toluene at 25 °C.

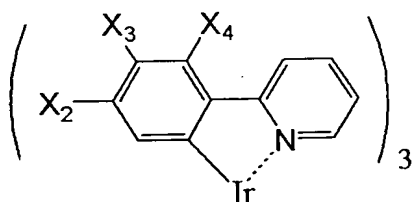

10 With respect to the Hammett's substituent constant σ , a Hammett's substituent constant σ_m for meta-position was used for the substituents X2 and X4 and a Hammett's substituent constant σ_p for para-position was used for the substituent X3. When two or
15 more substituents other than hydrogen atom were present at X2 to X4, a sum of σ_m and σ_p was used as a Hammett's substituent constant σ .

In the present invention, specific values of σ_m and σ_p described on pages 96 - 103 (Table 1) of
20 "Correlation between Structure and Activation of Drugs", Chemical Region Extra Edition 122, issued by Nanko-do (Japan) were used as those for X2 to X4. A part of σ_m and σ_p described therein is shown in Table 1 below.

Table 1

Substituent	op	om
F	0.06	0.34
Cl	0.23	0.37
CF ₃	0.54	0.43

For example, a metal coordination compound (Example Compound No. (121) appearing hereinafter, $X_2 = F$, $X_3 = CF_3$, $X_4 = H$) has a Hammett's substituent constant $\sigma = 0.34 + 0.54 = 0.88$. In a similar manner, Hammett's substituent constants σ of several metal coordination compounds (Ex. Comp. Nos. (1), (32), (122) and (111) described later and the metal coordination compound A described in the above-mentioned Document 2) are calculated and shown in Table 2 below together with corresponding peak emission wavelength λ_{PE} in toluene at 25 °C. The results of Table 2 are also shown in Figure 2.

Table 2

	Compound	σ	λ_{PE} (nm)
5	Ex. Comp. No. (1)	0.06	522
	Metal coordination compound A	0.40	505
	Ex. Comp. No. (32)	0.54	487
	Ex. Comp. No. (122)	0.68	471
	Ex. Comp. No. (121)	0.88	466
10	Ex. Comp. No. (111)	0.91	479

As apparent from Table 2 and Figure 2, introduction of substituent(s) having a larger Hammett's substituent constant is very effective to shorten the peak emission wavelength. Specifically, the metal coordination compound having the sum of peak emission wavelengths of at least 0.41, particularly at least 0.50 is suitable as the blue luminescent material. A similar effect can be expected also for metal coordination compounds other than the metal coordination compound of formula (1) of the present invention.

As described above, the metal coordination compound of formula (1) is a suitable luminescent material for the EL device.

Further, as shown in Examples appearing

5 This may be attributable to introduction of
particular substituents (X1 to X8) allowing control of
intermolecular interaction with a host luminescent
material (e.g., CBP described above) and suppression
of formation of associated exciton leading to thermal
quenching, thus minimizing quenching to improve device
10 characteristics.

Further, compared with 4-, 5-fluorine (substituted) iridium-phenylpyrimidine complex (metal coordination compound A) described in the above-mentioned Document 2, it has been substantiated that a luminescence device using the metal coordination compound of formula (1) according to the present invention has a higher durability, i.e., a higher luminance stability for a long period, shown in

Examples described later.

Further, in the case of phosphorescent (luminescent) material, luminescent characteristics are largely affected by its molecular environment. On the other hand, principal characteristics of the fluorescent material are studied based on photoluminescence.

For this reason, results of photoluminescence of the phosphorescent material do not reflect luminescent characteristics of the resultant EL device in many cases since the luminescent characteristics in the case of the phosphorescent material depend on a magnitude of polarity of ambient host material molecules, ambient temperature, presence state of the material (e.g., solid state or liquid state, etc. Accordingly, different from the fluorescent material, it is generally difficult to expect the resultant EL characteristics for the phosphorescent material by simply removing a part of characteristics from photoluminescence results.

Next, the metal coordination compound of formula (2) according to the present invention will be described.

The metal coordination compound of formula (2) may preferably have hydrogen atom(s) as at least one of X1 and X2 in the formula (2).

Similarly as the metal coordination compound

of formula (1), the metal coordination compound of
formula (2) also causes phosphorescence (luminescence)
and is assumed to have a lowest excited state
comprising a triplet excited state liable to cause
5 metal-to-ligand charge transfer (MLCT* state). The
phosphorescent emission of light (phosphorescence) is
produced during the transition from the MLCT* state to
the ground state.

The metal coordination compound according to
10 the present invention has been found to provide a
higher phosphorescence yield of 0.15 - 0.9 and a
shorter phosphorescence life of 1 - 40 μ sec, as a
result of a luminescence test based on photo-
luminescence by photo-excitation.

15 The shorter phosphorescence life is necessary
to provide a resultant EL device with a higher
luminescence efficiency. This is because the longer
phosphorescence life increases molecules placed in
their triplet excited state which is a waiting state
20 for phosphorescence, thus lowering the resultant
luminescence efficiency particularly at a higher
current density.

Accordingly, the metal coordination compound
of formula (2) according to the present invention is a
25 suitable luminescent material for an EL device with a
higher phosphorescence yield and a shorter
phosphorescence life.

00961075.092404

Further, by appropriately modifying the
alkylene group Y and/or the substituents X1 and X2,
emission wavelength control can be expected for
the resultant metal coordination compound of formula
5 (2).

As described above, the metal coordination
compound of formula (2) is a suitable luminescent
material for the EL device.

Further, as shown in Examples appearing
10 hereinafter, it has been substantiated that the metal
coordination compound of formula (2) of the present
invention has an excellent stability in a continuous
energization test.

This may be attributable to introduction of
15 particular alkylene group and/or substituents (Y, X1,
X2) allowing control of intermolecular interaction
with a host luminescent material (e.g., CBP described
above) and suppression of formation of associated
exciton leading to thermal quenching, thus minimizing
20 quenching to improve device characteristics.

The luminescence device (EL) device according
to the present invention employs the above-mentioned
metal coordination compound in an organic layer,
particularly a luminescence layer.

25 Specifically, the luminescence device may
preferably include the organic layer comprising the
metal coordination compound of formula (1) or formula

00961075, 092401

(2) between a pair of oppositely disposed electrodes comprising a transparent electrode (anode) and a metal electrode (cathode) which are supplied with a voltage to cause luminescence, thus constituting an electric-field luminescence device.

SUB
A2
The liquid crystal of the present invention has a layer structure shown in Figures 1A to 1C as specifically described above.

By the use of the metal coordination compound of formula (1) or formula (2) of the present invention, the resultant luminescence device has a high luminescence efficiency as described above.

The luminescence device according to the present invention may be applicable to devices required to allow energy saving and high luminance, such as those for display apparatus and illumination apparatus, a light source for printers, and backlight (unit) for a liquid crystal display apparatus.


Specifically, in the case of using the luminescence device of the present invention in the display apparatus, it is possible to provide a flat panel display apparatus capable of exhibiting an excellent energy saving performance, a high visibility and a good lightweight property. With respect to the light source, it becomes possible to replace a laser light source of laser beam printer currently used widely with the luminescence device according to the present

09361075-092404


invention. Further, when the luminescence device of the present invention is arranged in independently addressable arrays as an exposure means for effecting desired exposure of light to a photosensitive drum for forming an image, it becomes possible to considerably reducing the volume (size) of image forming apparatus. With respect to the illumination apparatus and backlight (unit), the resultant apparatus (unit) using the luminescence device of the present invention is expected to have an energy saving effect.

The metal coordination compound of formula (1) may generally be synthesized through the following reaction scheme.


(Iridium complex)

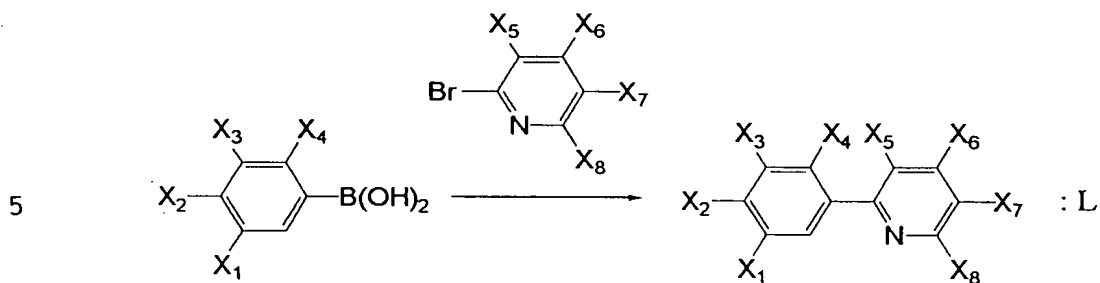

10




or



(Rhodium complex)

Rh complex may be synthesized in the same manner as in Ir complex shown above.

20 (Palladium complex)

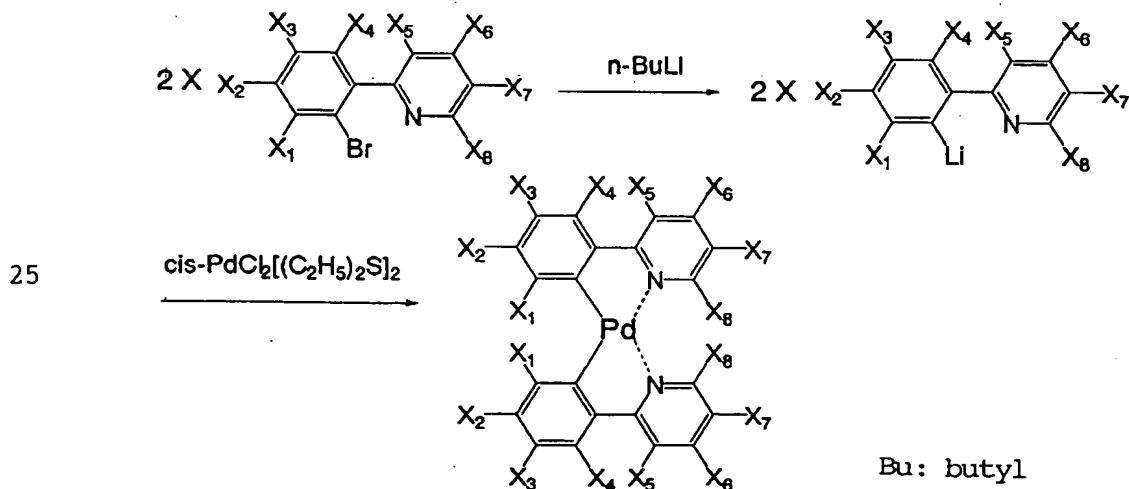

25

FOI260" 52019660

Table 3

No.	M	n	X ₁	X ₂	X ₃	X ₄	X ₅	X ₆	X ₇	X ₈
(1)	Ir	3	H	H	F	H	H	H	H	H
(2)	Ir	3	H	F	H	H	H	H	H	H
(3)	Ir	3	H	H	Cl	H	H	H	H	H
(4)	Ir	3	H	H	F	H	H	OCH ₃	H	H
(5)	Ir	3	H	H	F	H	H	H	Br	H
(6)	Ir	3	H	C ₂ H ₅	H	H	H	H	H	H
(7)	Ir	3	H	H	NO ₂	H	H	H	H	H
(8)	Ir	3	H	H	NO ₂	H	H	H	CF ₃	H
(9)	Ir	3	H	H	NO ₂	H	H	NO ₂	H	H
(10)	Ir	3	H	H	NO ₂	H	H	OC ₁₁ H ₂₃	H	H
(11)	Ir	3	H	H	C ₃ H ₇	H	H	H	H	H
(12)	Ir	3	H	C ₂ H ₅	OCH ₃	H	H	H	H	H
(13)	Ir	3	H	H	C ₃ H ₇	H	H	OC ₂ H ₉	H	H
(14)	Ir	3	H	C ₂₀ H ₄₁	H	H	H	H	H	H
(15)	Ir	3	H	H	OCH ₃	H	H	H	H	H
(16)	Ir	3	H	OCH ₃	OCH ₃	H	H	H	H	H
(17)	Ir	3	H	H	OCH(CH ₃) ₂	H	H	H	H	H
(18)	Ir	3	H	H	OC ₅ H ₁₁	H	H	H	H	H
(19)	Ir	3	H	H	OC ₁₀ H ₂₃	H	H	H	H	H
(20)	Ir	3	H	H	OCH ₃	H	H	OCH ₃	H	H
(21)	Ir	3	H	H	OCH(CH ₃) ₂	H	H	OCH ₃	H	H
(22)	Ir	3	H	H	OC ₁₀ H ₂₁	H	H	NO ₂	H	H
(23)	Ir	3	H	H	OCH(CH ₃) ₂	H	H	H	CF ₃	H
(24)	Ir	3	H	H	SCH ₃	H	H	H	H	H
(25)	Ir	3	H	OCH ₂ CH=CH ₂	H	H	H	H	H	H
(26)	Ir	3	H	H	OCH ₂ C≡CCH ₃	H	H	H	H	H
(27)	Ir	3	H	H	COCH ₃	H	H	H	H	H
(28)	Ir	3	H	H	COCH ₃	H	H	NO ₂	H	H
(29)	Ir	3	H	H	COCH ₃	H	H	H	CF ₃	H
(30)	Ir	3	H	H	COCH ₃	H	H	OCH ₃	H	H

FOI200" 54079660

Table 4

No.	M	n	X ₁	X ₂	X ₃	X ₄	X ₅	X ₆	X ₇	X ₈
(31)	Ir	3	H	H	COC ₉ H ₁₉	H	H	H	H	H
(32)	Ir	3	H	H	CF ₃	H	H	H	H	H
(33)	Ir	3	H	H	CF ₃	H	H	H	CF ₃	H
(34)	Ir	3	H	H	CF ₃	H	H	NO ₂	H	H
(35)	Ir	3	H	H	CF ₃	H	H	OCH(CH ₃) ₂	H	H
(36)	Ir	3	H	C ₃ F ₇	H	H	H	H	H	H
(37)	Ir	3	H	H	OCF ₃	H	H	H	H	H
(38)	Ir	3	H	OCF ₃	H	H	H	H	H	H
(39)	Ir	3	H	H	OCF ₃	H	H	NO ₂	H	H
(40)	Ir	3	H	H	OCF ₃	H	H	H	CF ₃	H
(41)	Ir	3	H	H	OCF ₃	H	H	OCH ₃	H	H
(42)	Ir	3	H	H	OCH ₂ C ₃ F ₇	H	H	H	H	H
(43)	Ir	3	H	O(CH ₂) ₃ C ₂ F ₅	H	H	H	H	H	H
(44)	Ir	3	H	H	O(CH ₂) ₃ OCH ₂ C ₂ F ₅	H	H	H	H	H
(45)	Ir	3	H	H	COOC ₂ H ₅	H	H	H	H	H
(46)	Ir	3	H	OCOCH ₃	H	H	H	H	H	H
(47)	Ir	3	H	H	O(CH ₂) ₂ C ₃ F ₇	H	H	OCH ₃	C ₃ F ₁₁	H
(48)	Ir	3	H	H	H	H	H	H	CF ₃	H
(49)	Ir	3	H	H	H	H	H	H	NO ₂	H
(50)	Ir	3	H	H	H	H	H	H	H	H
(51)	Ir	3	H	H	Si(CH ₃) ₃	H	H	H	H	H
(52)	Ir	3	H	H	Si(CH ₃) ₂ C ₄ H ₉	H	H	H	H	H
(53)	Ir	3	H	Si(CH ₃) ₂ C ₈ H ₁₇	H	H	H	H	H	H
(54)	Ir	3	H	H	Si(C ₂ H ₅) ₃	H	H	H	H	H
(55)	Ir	3	H	H	H	H	H	Si(CH ₃) ₂ C ₈ H ₁₃	H	H
(56)	Ir	3	H	C ₂ H ₅	OCH ₃	H	H	OCH ₃	H	H
(57)	Ir	3	H	F	H	F	H	OCH ₃	H	H
(58)	Ir	3	H	F	H	F	H	OCH ₃	CF ₃	H
(59)	Ir	3	H	H	Si(CH ₃) ₃	H	H	H	Br	H
(60)	Ir	3	H	Si(CH ₃) ₂ C ₇ H ₁₅	OCH ₃	H	H	H	H	H

TABLE 5
Table 5

No.	M	n	X ₁	X ₂	X ₃	X ₄	X ₅	X ₆	X ₇	X ₈
(61)	Rh	3	H	H	F	H	H	H	H	H
(62)	Rh	3	F	F	H	H	H	H	H	H
(63)	Rh	3	H	H	F	H	H	OCH ₃	H	H
(64)	Rh	3	H	H	NO ₂	H	H	H	H	H
(65)	Rh	3	H	H	NO ₂	H	H	OC ₈ H ₁₇	H	H
(66)	Rh	3	H	H	C ₂ H ₅	H	H	H	H	H
(67)	Rh	3	H	C ₂ H ₅	OCH ₃	H	H	H	H	H
(68)	Rh	3	H	C ₁₂ H ₂₅	H	H	H	H	H	H
(69)	Rh	3	H	C ₃ H ₇	H	H	H	OCH ₃	H	H
(70)	Rh	3	H	H	OCH(CH ₃) ₂	H	H	H	H	H
(71)	Rh	3	H	H	OC ₁₅ H ₃₁	H	H	H	H	H
(72)	Rh	3	H	H	OC ₈ H ₁₃	H	H	NO ₂	H	H
(73)	Rh	3	H	H	OCH ₃	H	H	OCH ₃	H	H
(74)	Rh	3	H	H	OCH(CH ₃) ₂	H	H	H	CF ₃	H
(75)	Rh	3	H	H	OCH ₂ CH=CH ₂	H	H	H	H	H
(76)	Rh	3	H	OC≡CC ₄ H ₉	H	H	H	H	H	H
(77)	Rh	3	H	H	SC ₂ H ₅	H	H	H	H	H
(78)	Rh	3	H	H	SCH ₃	H	H	OCH ₃	H	H
(79)	Rh	3	H	SCH ₃	SCH ₃	H	H	H	H	H
(80)	Rh	3	H	H	COCH ₃	H	H	H	H	H
(81)	Rh	3	H	H	COCH ₃	H	H	OCH ₃	H	H
(82)	Rh	3	H	H	CF ₃	H	H	H	H	H
(83)	Rh	3	H	H	CF ₃	H	H	OCH(CH ₃) ₂	H	H
(84)	Rh	3	H	H	OCF ₃	H	H	H	CF ₃	H
(85)	Rh	3	H	H	OCH ₂ C ₄ F ₉	H	H	H	H	H
(86)	Rh	3	H	H	O(CH ₂) ₆ C ₂ F ₅	H	H	H	H	H
(87)	Rh	3	H	H	H	H	H	OCH ₃	H	H
(88)	Rh	3	H	H	Si(CH ₃) ₃	H	H	H	H	H
(89)	Rh	3	H	Si(CH ₃) ₂ C ₆ H ₁₃	H	H	H	H	H	H
(90)	Rh	3	H	Si(CH ₃) ₂ C ₇ H ₁₅	OCH ₃	H	H	H	H	H

FOIb60" 54079660

Table 6

No.	M	n	X ₁	X ₂	X ₃	X ₄	X ₅	X ₆	X ₇	X ₈
(91)	Pd	2	H	H	F	H	H	H	H	H
(92)	Pd	2	H	F	H	F	H	H	H	H
(93)	Pd	2	H	H	F	H	H	OC ₇ H ₁₅	H	H
(94)	Pd	2	H	H	NO ₂	H	H	H	H	H
(95)	Pd	2	H	H	NO ₂	H	H	OC ₃ H ₁₁	H	H
(96)	Pd	2	H	C ₂ H ₅	OCH ₃	H	H	H	H	H
(97)	Pd	2	H	H	C ₃ H ₁₁	H	H	OCH ₃	H	H
(98)	Pd	2	H	C ₁₅ H ₃₁	H	H	H	H	H	H
(99)	Pd	2	H	H	OCH(CH ₃) ₂	H	H	H	H	H
(100)	Pd	2	H	H	OC ₃ H ₇	H	H	H	H	H
(101)	Pd	2	H	H	COC ₃ H ₁₇	H	H	H	H	H
(102)	Pd	2	H	H	OF ₃	H	H	H	H	H
(103)	Pd	2	H	H	CF ₃	H	H	OCH(CH ₃) ₂	H	H
(104)	Pd	2	H	H	OCF ₃	H	H	H	CF ₃	H
(105)	Pd	2	H	H	Si(CH ₃) ₃	H	H	H	H	H
(106)	Pd	2	H	H	F	H	H	OC ₃ H ₁₁	H	H
(107)	Pd	2	H	H	NO ₂	H	H	OC ₃ H ₇	H	H
(108)	Pd	2	H	H	C ₂ H ₅	H	H	OCH ₃	H	H
(109)	Pd	2	H	C ₁₀ H ₂₁	H	H	H	H	H	H
(110)	Pd	2	H	H	COCH ₃	H	H	H	H	H
(111)	Ir	3	H	Cl	CF ₃	H	H	H	H	H
(112)	Ir	3	H	Cl	CF ₃	H	H	H	CF ₃	H
(113)	Ir	3	H	Cl	CF ₃	H	H	OCH ₃	H	H
(114)	Rh	3	H	Cl	CF ₃	H	H	H	H	H
(115)	Rh	3	H	Cl	CF ₃	H	H	H	CF ₃	H
(116)	Rh	3	H	Cl	CF ₃	H	H	CF ₃	H	H
(117)	Rh	3	H	Cl	CF ₃	H	H	OCH ₃	H	H
(118)	Rh	3	H	Cl	CF ₃	H	H	C ₂ H ₅	H	H
(119)	Pd	2	H	Cl	CF ₃	H	H	H	H	H
(120)	Pd	2	H	Cl	CF ₃	H	H	H	CF ₃	CF ₃

FOI260 54079660

Table 7

No.	M	n	X ₁	X ₂	X ₃	X ₄	X ₅	X ₆	X ₇	X ₈
(121)	Ir	3	H	F	CF ₃	H	H	H	H	H
(122)	Ir	3	H	F	H	F	H	H	H	H
(123)	Ir	3	H	CF ₃	H	CF ₃	H	H	H	H
(124)	Ir	3	H	CF ₃	H	F	H	H	H	H
(125)	Ir	3	H	CF ₃	CF ₃	H	H	H	Br	H
(126)	Ir	3	F	C ₂ H ₆	H	H	H	H	H	H
(127)	Ir	3	F	H	NO ₂	H	H	H	H	H
(128)	Ir	3	F	H	NO ₂	F	H	H	CF ₃	H
(129)	Ir	3	F	H	NO ₂	H	H	NO ₂	H	H
(130)	Ir	3	F	H	NO ₂	H	H	OC ₁₁ H ₂₃	H	H
(131)	Ir	3	F	H	C ₃ H ₇	H	H	H	H	H
(132)	Ir	3	F	C ₂ H ₅	OCH ₃	H	H	H	H	H
(133)	Ir	4	F	H	C ₃ H ₇	H	H	OC ₄ H ₉	H	H
(134)	Ir	3	H	C ₂₀ H ₄₁	H	F	H	H	H	H
(135)	Ir	3	H	H	OCH ₃	F	H	H	H	H
(136)	Ir	3	H	OCH ₃	OCH ₃	F	H	H	H	H
(137)	Ir	3	H	H	OCH(CH ₃) ₂	F	H	H	H	H
(138)	Ir	3	H	H	OC ₃ H ₁₁	F	H	H	H	H
(139)	Ir	3	H	H	OC ₁₈ H ₃₉	F	H	H	H	H
(140)	Ir	3	H	H	OCH ₃	F	H	OCH ₃	H	H
(141)	Ir	3	H	H	OCH(CH ₃) ₂	H	F	OCH ₃	H	H
(142)	Ir	3	H	H	OC ₁₀ H ₂₁	H	F	NO ₂	H	H
(143)	Ir	3	H	H	OCH(CH ₃) ₂	H	F	H	OF ₃	H
(144)	Ir	3	H	H	SCCH ₃	H	C ₂ H ₅	H	H	H
(145)	Ir	3	H	OCH ₂ CH=OH ₂	H	H	C ₂ H ₅	H	H	H
(146)	Ir	3	H	H	OCH ₂ C≡CCH ₃	H	C ₂ H ₅	H	H	F
(147)	Ir	3	H	H	COCH ₃	H	H	H	H	F
(148)	Ir	3	H	H	COCH ₃	H	H	NO ₂	H	F
(149)	Ir	3	H	H	COCH ₃	H	H	H	CF ₃	F
(150)	Ir	3	CF ₃	H	COCH ₃	H	H	OCH ₃	H	H



FOI260" 54073660

Table 8


No.	M	n	X ₁	X ₂	X ₃	X ₄	X ₅	X ₆	X ₇	X ₈
(151)	Ir	3	F	H	COO ₂ H ₁₉	H	H	H	H	H
(152)	Ir	3	H	CF ₃	H	F	H	H	H	H
(153)	Ir	3	F	H	CF ₃	H	H	H	CF ₃	H
(154)	Ir	3	H	H	CF ₃	F	H	NO ₂	H	H
(155)	Ir	3	H	H	CF ₃	F	H	OCH(CH ₃) ₂	H	H
(156)	Ir	3	H	C ₃ F ₇	H	CF ₃	H	H	H	H
(157)	Ir	3	H	H	OCF ₃	H	CF ₃	H	H	H
(158)	Ir	3	H	OCF ₃	H	H	C ₂ H ₅	H	H	H
(159)	Ir	3	H	CF ₃	H	CF ₃	H	H	CF ₃	H
(160)	Ir	3	H	H	OCF ₃	H	F	H	H	F
(161)	Ir	3	H	H	OCF ₃	H	H	OCH ₃	H	F
(162)	Ir	3	H	H	OCH ₂ C ₃ F ₇	H	H	H	H	F
(163)	Ir	3	H	O(CH ₂) ₃ C ₂ F ₅	H	H	H	H	H	H
(164)	Ir	3	H	H	O(CH ₂) ₃ OCH ₂ C ₂ F ₅	Cl	H	H	H	H
(165)	Ir	3	H	H	COOC ₂ H ₅	F	H	H	H	H
(166)	Rh	3	H	OCOCH ₃	H	H	F	H	C ₃ F ₁₁	H
(167)	Rh	3	H	H	O(CH ₂) ₂ C ₃ F ₇	H	C ₂ H ₅	H	H	F
(168)	Rh	3	H	H	H	H	H	OCH ₃	CF ₃	F
(169)	Rh	3	H	H	H	H	H	H	NO ₂	F
(170)	Rh	3	H	H	H	H	H	H	H	F
(171)	Rh	3	H	H	Si(CH ₃) ₃	H	H	H	H	F
(172)	Rh	3	H	H	Si(CH ₃) ₂ C ₆ H ₁₃	H	H	H	H	H
(173)	Rh	3	H	Si(CH ₃) ₂ C ₆ H ₁₇	H	F	H	H	H	H
(174)	Rh	3	H	H	Si(CH ₃) ₃	F	H	H	H	H
(175)	Rh	3	H	H	H	F	H	Si(CH ₃) ₂ C ₆ H ₁₃	H	H
(176)	Pd	2	H	C ₂ H ₅	OCH ₃	F	H	OCH ₃	H	H
(177)	Pd	2	F	H	F	F	H	OCH ₃	H	H
(178)	Pd	2	F	H	F	F	H	OCH ₃	CF ₃	H
(179)	Pd	2	F	H	Si(CH ₃) ₃	H	H	H	Br	H
(180)	Pd	2	F	Si(CH ₃) ₂ C ₇ H ₁₅	OCH ₃	H	H	H	H	H

The metal coordination compound of formula (2) may generally be synthesized through the following reaction scheme.

(Iridium complex)

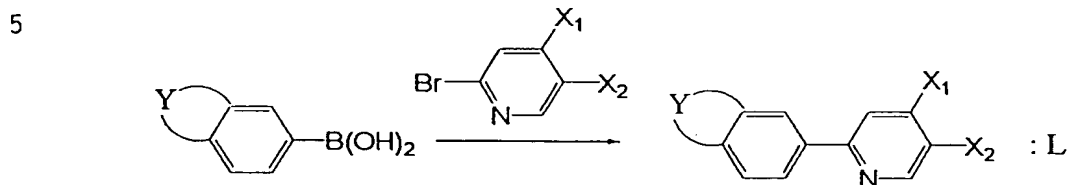


or



(Rhodium complex)

Rh complex may be synthesized in the same manner as in Ir complex shown above.

(Palladium complex)

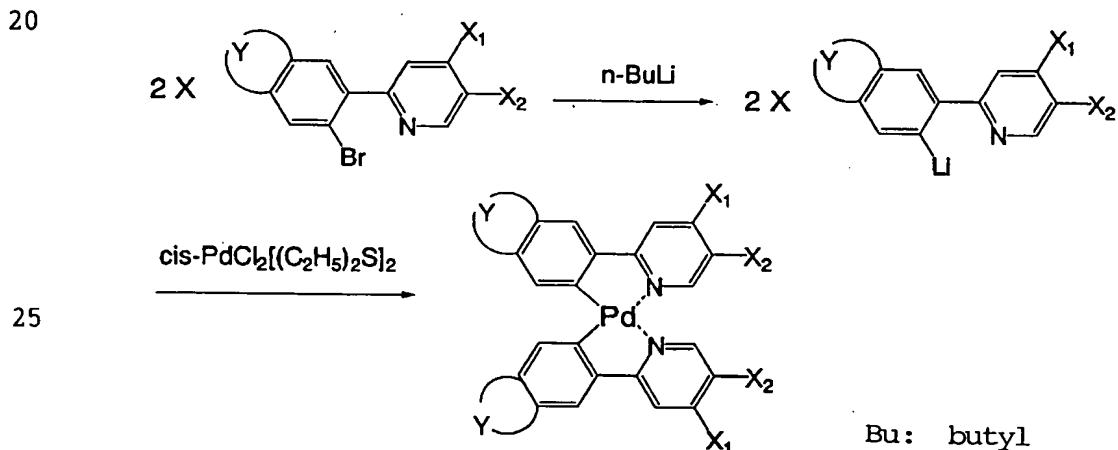

Specific and non-exhaustive examples of the metal coordination compound of formula (2) may include those (Example Compound Nos. (2-1) to (2-200) shown in Tables 9 - 15 wherein Ex. Comp. Nos. (2-1) to (2-200) are simply indicated as (1) to (200), respectively.

In Tables 9 - 15, symbols A to C' for alkylene group Y represents alkylene groups shown below.

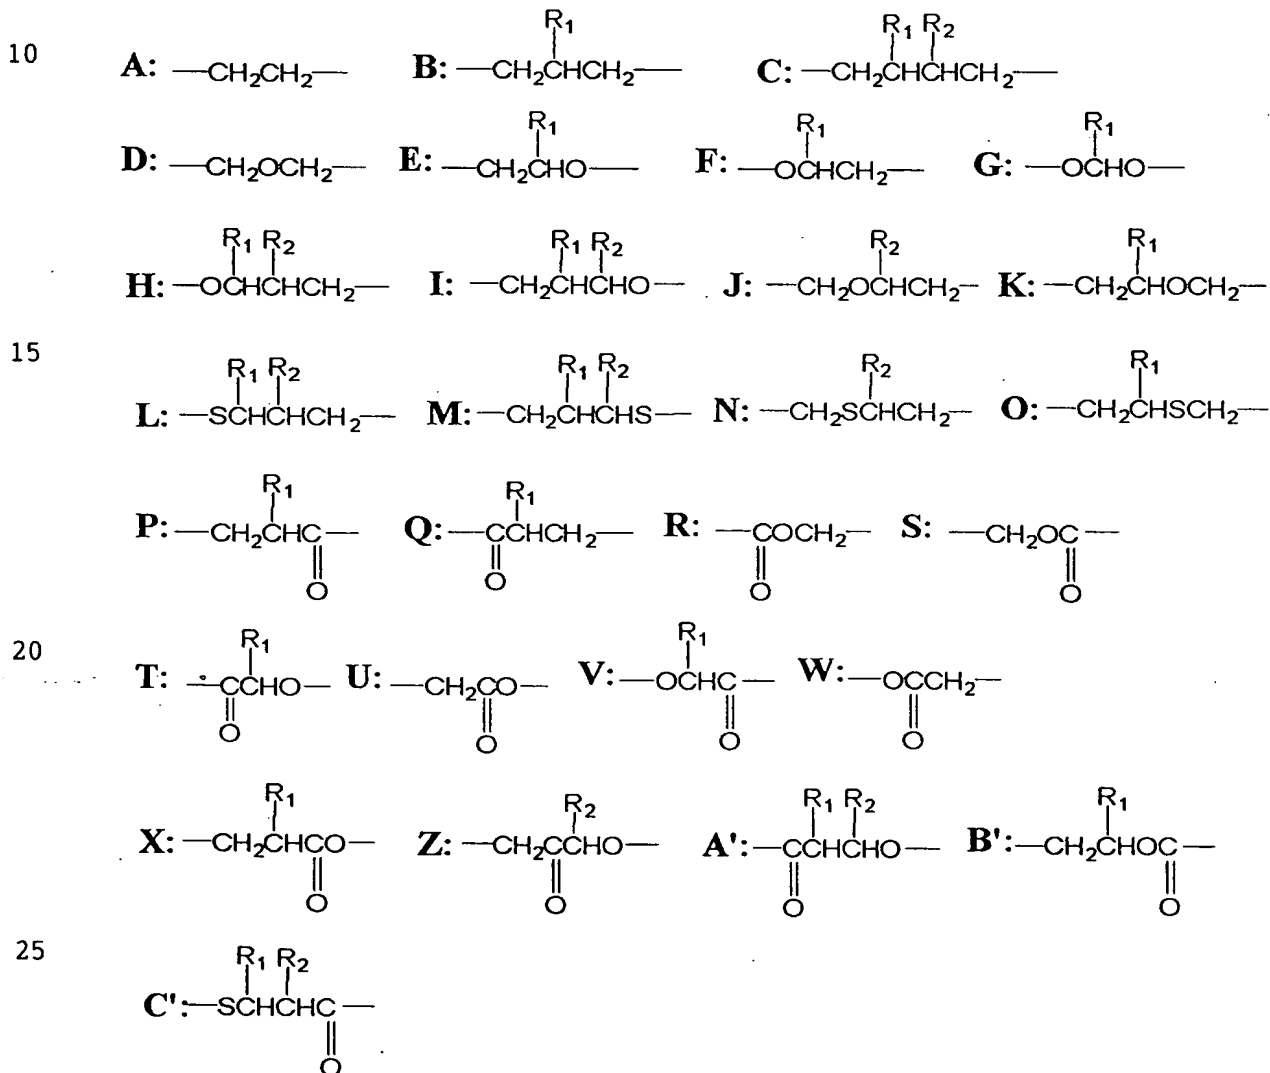


Table 9

5

10

15

20

No.	M	n	Y	R ₁	R ₂	X ₁	X ₂
(1)	Ir	3	A	—	—	H	H
(2)	Ir	3	A	—	—	OCH ₃	H
(3)	Ir	3	B	H	—	H	H
(4)	Ir	3	B	H	—	OCH ₃	H
(5)	Ir	3	B	H	—	H	CF ₃
(6)	Ir	3	B	H	—	H	Cl
(7)	Ir	3	B	CH ₃	—	H	H
(8)	Ir	3	B	CH ₃	—	F	H
(9)	Ir	3	B	CH ₃	—	NO ₂	H
(10)	Ir	3	B	C ₂ H ₅	—	H	H
(11)	Ir	3	B	C ₃ H ₇	—	H	CF ₃
(12)	Ir	3	B	C ₂ H ₅ (CH ₃)CHCH ₂	—	H	H
(13)	Ir	4	B	C ₈ H ₁₃	—	OCH(CH ₃) ₂	H
(14)	Ir	3	B	C ₁₀ H ₂₁	—	Si(CH ₃) ₃	H
(15)	Ir	3	C	H	H	H	H
(16)	Ir	3	C	H	H	OCH ₃	H
(17)	Ir	3	C	H	H	H	CF ₃
(18)	Ir	3	C	H	H	F	H
(19)	Ir	3	C	H	H	NO ₂	H
(20)	Ir	3	C	H	H	OC ₅ H ₁₁	H
(21)	Ir	3	C	H	H	O(CH ₂) ₂ C ₃ F ₇	H
(22)	Ir	3	C	H	H	H	Si(C ₂ H ₅) ₃
(23)	Ir	3	C	H	H	H	Br
(24)	Ir	3	C	H	H	CH ₃	H
(25)	Ir	3	C	CH ₃	H	CH ₃	H
(26)	Ir	3	C	H	CH ₃	H	H
(27)	Ir	3	C	CH ₃	CH ₃	H	H
(28)	Ir	3	C	C ₃ H ₇	H	Si(CH ₃) ₃	H
(29)	Ir	3	C	H	C ₅ H ₁₁	H	H
(30)	Ir	3	C	C ₈ H ₁₇	H	Cl	H

25

TOP SECRET 52079660

Table 10

No.	M	n	Y	R ₁	R ₂	X ₁	X ₂
(31)	Ir	3	C	C ₂ H ₅	C ₂ H ₅	H	C ₇ F ₁₅
(32)	Ir	3	C	H	C ₆ H ₁₃	NO ₂	H
(33)	Ir	3	C	C ₁₀ H ₂₁	H	CF ₃	H
(34)	Ir	3	C	H	C ₉ H ₁₉	H	OC ₄ H ₉
(35)	Ir	3	D	—	—	H	H
(36)	Ir	3	D	—	—	OCH ₃	H
(37)	Ir	3	E	H	—	H	H
(38)	Ir	3	E	H	—	H	NO ₂
(39)	Ir	3	E	CH ₃	—	H	H
(40)	Ir	3	E	CH ₃	—	OCH ₃	H
(41)	Ir	3	E	CH ₃	—	H	CF ₃
(42)	Ir	3	E	CH ₃	—	NO ₂	H
(43)	Ir	3	E	CH ₃	—	OC ₃ H ₇	H
(44)	Ir	3	E	C ₂ H ₅	—	H	H
(45)	Ir	3	E	C ₂ H ₅	—	H	CF ₃
(46)	Ir	3	E	C ₃ H ₇	—	H	H
(47)	Ir	3	E	C ₃ H ₇	—	OC ₅ H ₁₁	H
(48)	Ir	3	E	(CH ₃) ₂ CHCH ₂ CH ₂	—	H	H
(49)	Ir	3	E	C ₅ H ₁₁	—	H	C ₄ F ₉
(50)	Ir	3	E	C ₆ H ₁₃	—	H	H
(51)	Ir	3	E	C ₆ H ₁₃	—	H	Br
(52)	Ir	3	E	C ₆ H ₁₃	—	NO ₂	H
(53)	Ir	3	E	C ₈ H ₁₇	—	H	H
(54)	Ir	3	E	C ₉ H ₁₉	—	OCH ₂ C≡CCH ₃	H
(55)	Ir	3	E	C ₁₀ H ₂₁	—	H	H
(56)	Ir	3	E	C ₁₀ H ₂₁	—	OCH ₂ CH=CH ₂	H
(57)	Ir	3	F	H	—	OCH ₃	H
(58)	Ir	3	F	CH ₃	—	H	H
(59)	Ir	3	F	CH ₃	—	OCH ₃	H
(60)	Ir	3	F	C ₂ H ₅	—	H	CF ₃

09061075-092401

5

10

15

20

25

Table 11

No.	M	n	Y	R ₁	R ₂	X ₁	X ₂
(61)	Ir	3	F	C ₆ H ₁₃	—	OCH(CH ₃) ₂	H
(62)	Ir	3	F	C ₈ H ₁₇	—	Si(CH ₃) ₂ C ₈ H ₁₇	H
(63)	Ir	3	G	H	—	OCH ₃	H
(64)	Ir	3	G	H	—	H	CF ₃
(65)	Ir	3	G	H	—	O(CH ₂) ₃ OCH ₂ C ₂ F ₅	H
(66)	Ir	3	G	CH ₃	—	H	H
(67)	Ir	3	H	H	H	H	H
(68)	Ir	3	H	CH ₃	H	Si(CH ₃) ₃	H
(69)	Ir	3	H	H	CH ₃	H	Cl
(70)	Ir	3	I	H	H	H	H
(71)	Ir	3	I	H	H	OCH ₃	H
(72)	Ir	3	I	H	H	H	CF ₃
(73)	Ir	3	I	H	H	H	CH ₃
(74)	Ir	3	I	C ₂ H ₅	H	COOC ₂ H ₅	H
(75)	Ir	3	I	H	C ₅ H ₁₁	OCH ₂ CH=CH ₂	H
(76)	Ir	3	J	H	—	H	H
(77)	Ir	3	J	H	—	NO ₂	H
(78)	Ir	3	J	CH ₃	—	OCH ₃	H
(79)	Ir	3	K	H	—	H	H
(80)	Ir	3	K	H	—	H	Si(CH ₃) ₃
(81)	Ir	3	K	C ₃ H ₇	—	H	CF ₃
(82)	Ir	3	L	H	H	H	H
(83)	Ir	3	L	CH ₃	H	SC ₂ H ₅	H
(84)	Ir	3	L	H	CH ₃	OC ₆ H ₁₃	H
(85)	Ir	3	M	H	H	H	H
(86)	Ir	3	M	C ₂ H ₅	H	COOC ₃ H ₇	H
(87)	Ir	3	M	H	C ₂ H ₅	H	O(CH ₂) ₃ C ₂ F ₅
(88)	Ir	3	N	—	H	H	H
(89)	Ir	3	N	—	C ₂ H ₅	H	NO ₂
(90)	Ir	3	N	—	C ₆ H ₁₃	Cl	H

09561075-092404

Table 12

No.	M	n	Y	R ₁	R ₂	X ₁	X ₂
(91)	Ir	3	O	H	—	H	H
(92)	Ir	3	O	H	—	H	Si(C ₂ H ₅) ₃
(93)	Ir	3	O	C ₆ H ₇	—	OCH(CH ₃) ₂	H
(94)	Ir	3	P	H	—	H	H
(95)	Ir	3	P	C ₃ H ₇	—	H	COOCH ₃
(96)	Ir	3	P	C ₆ H ₁₃	—	H	H
(97)	Ir	3	Q	H	—	H	H
(98)	Ir	3	Q	C ₄ H ₉	—	O(CH ₂) ₃ CH=CH ₂	H
(99)	Ir	3	R	—	—	H	H
(100)	Ir	3	R	—	—	H	CF ₃
(101)	Ir	3	S	—	—	H	H
(102)	Ir	3	S	—	—	OC ₂ H ₅	H
(103)	Ir	3	T	H	—	H	Br
(104)	Ir	3	T	C ₂ H ₅	—	H	H
(105)	Ir	3	U	—	—	H	H
(106)	Ir	3	U	—	—	H	C ₇ F ₁₅
(107)	Ir	3	V	H	—	H	H
(108)	Ir	3	W	—	—	OCH ₂ C≡CCH ₃	H
(109)	Ir	3	X	CH ₃	—	H	H
(110)	Ir	3	Z	—	H	O(CH ₂) ₂ CH(CH ₃) ₂	H
(111)	Ir	3	Z	—	C ₃ H ₇	H	H
(112)	Ir	3	A'	H	H	H	H
(113)	Ir	3	B'	H	—	H	NO ₂
(114)	Ir	3	B'	CH ₃	—	H	H
(115)	Ir	3	C'	H	C ₉ H ₁₉	OCH ₃	H
(116)	Pt	2	A	—	—	H	H
(117)	Pt	2	B	H	—	H	H
(118)	Pt	2	B	H	—	H	C ₄ F ₉
(119)	Pt	2	B	CH ₃	—	OCH ₃	H
(120)	Pt	2	B	C ₃ H ₇	—	H	CF ₃

704260-52079660

5

10

15

20

25

5

10

15

20

25

No.	M	n	Y	R ₁	R ₂	X ₁	X ₂
(121)	Pt	2	B	C ₈ H ₁₇	—	H	H
(122)	Pt	2	C	H	H	H	H
(123)	Pt	2	C	H	H	H	CF ₃
(124)	Pt	2	C	CH ₃	CH ₃	H	H
(125)	Pt	2	C	C ₂ H ₅	H	H	H
(126)	Pt	2	C	C ₁₀ H ₂₁	H	OCH ₃	H
(127)	Pt	2	D	—	—	H	H
(128)	Pt	2	E	H	—	H	H
(129)	Pt	2	E	CH ₃	—	H	H
(130)	Pt	2	E	CH ₃	—	H	H
(131)	Pt	2	E	CH ₃	—	H	NO ₂
(132)	Pt	2	E	C ₆ H ₁₃	—	OC ₂ H ₅	H
(133)	Pt	2	F	CH ₃	—	H	H
(134)	Pt	2	F	C ₂ H ₅	—	H	CF ₃
(135)	Pt	2	G	H	—	H	H
(136)	Pt	2	G	H	—	H	Si(CH ₃) ₃
(137)	Pt	2	G	C ₄ H ₉	—	H	CH ₃
(138)	Pt	2	H	H	C ₆ H ₁₃	H	H
(139)	Pt	2	I	H	H	H	H
(140)	Pt	2	I	C ₂ H ₅	H	H	Si(C ₂ H ₅) ₃
(141)	Pt	2	J	—	H	H	H
(142)	Pt	2	K	C ₅ H ₁₁	—	H	H
(143)	Pt	2	L	C ₈ H ₁₇	H	SC ₂ H ₅	H
(144)	Pt	2	N	—	H	H	H
(145)	Pt	2	O	H	—	H	H
(146)	Pt	2	P	H	—	H	H
(147)	Pt	2	Q	H	—	H	CH ₃
(148)	Pt	2	R	—	—	H	H
(149)	Pt	2	U	—	—	H	H
(150)	Pt	2	V	H	—	NO ₂	H

Table 14

5

10

15

20

No.	M	n	Y	R ₁	R ₂	X ₁	X ₂
(151)	Pt	2	W	—	—	H	H
(152)	Pt	2	X	CH ₃	—	H	H
(153)	Pt	2	Z	—	H	H	H
(154)	Pt	2	A'	H	H	H	H
(155)	Pt	2	B'	H	—	OCH ₃	H
(156)	Pt	2	C'	H	H	H	CF ₃
(157)	Rh	3	B	H	—	H	Br
(158)	Rh	3	B	H	—	OC ₆ H ₁₃	H
(159)	Rh	3	B	CH ₃	—	H	H
(160)	Rh	3	C	H	H	H	H
(161)	Rh	3	C	H	H	OCH ₃	H
(162)	Rh	3	C	H	H	NO ₂	H
(163)	Rh	3	C	H	CH ₃	H	H
(164)	Rh	3	C	C ₆ H ₁₃	H	H	Si(CH ₃) ₃
(165)	Rh	3	D	—	—	H	H
(166)	Rh	3	E	H	—	COOC ₂ H ₅	H
(167)	Rh	3	E	CH ₃	—	H	H
(168)	Rh	3	E	CH ₃	—	H	O(CH ₂) ₆ C ₂ F ₅
(169)	Rh	3	E	C ₃ H ₇	—	H	H
(170)	Rh	3	E	C ₁₀ H ₂₁	—	H	H
(171)	Rh	3	F	C ₈ H ₁₇	—	H	H
(172)	Rh	3	G	H	—	OCH ₂ CH=CH ₂	H
(173)	Rh	3	G	CH ₃	—	H	CF ₃
(174)	Rh	3	H	H	H	H	H
(175)	Rh	3	I	H	H	H	H
(176)	Rh	3	K	C ₂ H ₅	—	Cl	H
(177)	Rh	3	M	H	H	H	H
(178)	Rh	3	N	—	H	H	H
(179)	Rh	3	P	CH ₃	—	H	NO ₂
(180)	Rh	3	S	—	—	H	H

25

Table 15

No.	M	n	Y	R ₁	R ₂	X ₁	X ₂
(181)	Rh	3	V	H	—	H	H
(182)	Rh	3	X	H	—	SC ₅ H ₁₁	H
(183)	Rh	3	C'	H		OC ₇ H ₁₅	H
(184)	Pd	2	B	C ₈ H ₁₃	—	H	H
(185)	Pd	2	C	H	H	OCH ₃	H
(186)	Pd	2	C	H	H	H	H
(187)	Pd	2	D	—	—	H	H
(188)	Pd	2	E	H	—	H	CF ₃
(189)	Pd	2	E	CH ₃	—	H	H
(190)	Pd	2	F	C ₃ H ₇	—	H	H
(191)	Pd	2	G	H	—	H	H
(192)	Pd	2	G	H	—	Si(CH ₃) ₃	H
(193)	Pd	2	I	CH ₃	H	NO ₂	H
(194)	Pd	2	J	—	H	H	H
(195)	Pd	2	L	H	H	H	H
(196)	Pd	2	M	H	H	C ₄ F ₉	H
(197)	Pd	2	O	H	—	H	C ₄ H ₉
(198)	Pd	2	T	H	—	H	H
(199)	Pd	2	W	—	—	OCH ₃	OCH ₃
(200)	Pd	2	A'	CH ₃	H	H	Cl

Hereinbelow, the present invention will be described more specifically based on Examples with reference to the drawing.

Examples I-1 - I-10

5 In these examples, metal coordination compounds of formula (1) (Ex. Comp. Nos. (I-4), (I-7), (I-17), (I-18), (I-21), (I-23), (I-32), (I-56), (I-67) and (I-74) were used in respective luminescence layers for Examples I-1 - I-10, respectively.

10 Each of luminescence devices having a structure shown in Figure 1B were prepared in the following manner.

 On a glass substrate (transparent substrate 15), a 100 nm-thick film (transparent electrode 14) of ITO (indium tin oxide) was formed by sputtering, followed by patterning to have an (opposing) electrode area of 3 mm².

 On the ITO-formed substrate, three organic layers and two metal electrode layers shown below were successively formed by vacuum (vapor) deposition using resistance heating in a vacuum chamber (10⁻⁴ Pa).

 Organic layer 1 (hole transport layer 13) (40 nm): α -NPD

 Organic layer 2 (luminescence layer 12) (20 nm): mixture of CBP: metal coordination compound of formula (1) (95:5 by weight)

 Organic layer 3 (electron transport layer 16)

(30 nm): Alq3

Metal electrode layer 1 (metal electrode 11)

(15 nm): Al-Li alloy (Li = 1.8 wt. %)

Metal electrode layer 2 (metal electrode 11)

5 (100 nm): Al

Each of the thus-prepared luminescence devices was taken out of the vacuum chamber and was subjected to a continuous energization test in an atmosphere of dry nitrogen gas stream so as to remove
10 device deterioration factors, such as oxygen and moisture (water content).


The continuous energization test was performed by continuously applying a voltage at a constant current density of 70 mA/cm^2 to the
15 luminescence device having the ITO (transparent) electrode (as an anode) and the Al (metal) electrode (as a cathode), followed by measurement of luminance (brightness) with time so as to determine a time (luminance half-life) required for decreasing an
20 initial luminance ($70 - 120 \text{ cd/m}^2$) to $1/2$ thereof.

The results are shown in Table 16 appearing hereinafter.

Comparative Example I-1

A comparative luminescence device was
25 prepared and evaluated in the same manner as in Example I-1 - I-10 except that the metal coordination compound of formula (1) was changed to Ir-

phenylpyrimidine complex (Ir(ppy)₃) shown below.

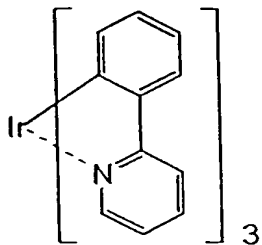

The results are shown in Table 16 below.

Table 16

Ex. No.	Ex.Comp. No.	Luminance half-life (Hr)
I-1	(I-4)	750
I-2	(I-7)	500
I-3	(I-17)	900
I-4	(I-18)	850
I-5	(I-21)	850
I-6	(I-23)	500
I-7	(I-32)	600
I-8	(I-56)	700
I-9	(I-67)	400
I-10	(I-74)	450
Comp. Ex. I-1	Ir(ppy) ₃	350

As is apparent from Table 16, compared with the conventional luminescence device using Ir(ppy)₃, the luminescence devices using the metal coordination compounds of formula (1) according to the present invention provide longer luminance half-lives, thus resulting in an EL device having a high durability (luminance stability) based on a good stability of the metal coordination compound of formula (1) of the present invention.

10 Examples I-11 - I-13

In these examples, metal coordination compounds of formula (1) (Ex. Comp. Nos. (I-1), (I-32) and (I-49) were used in respective luminescence layers for Examples I-11 - I-13, respectively.

15 Each of luminescence devices having a structure shown in Figure 1C were prepared in the following manner.

On a glass substrate (transparent substrate 15), a 100 nm-thick film (transparent electrode 14) of ITO (indium tin oxide) was formed by sputtering, followed by patterning to have an (opposing) electrode area of 3 mm².

On the ITO-formed substrate, three organic layers and two metal electrode layers shown below were successively formed by vacuum (vapor) deposition using resistance heating in a vacuum chamber (10⁻⁴ Pa).

Organic layer 1 (hole transport layer 13) (40

09061075-092404
F04260-52079550

Organic layer 2 (luminescence layer 12) (20 nm): mixture of CBP: metal coordination compound of formula (1) (93:7 by weight)

Organic layer 4 (electron transport layer 16)
(30 nm): Alq3

Metal electrode layer 2 (metal electrode 11)
(100 nm): Al

Separately, each of the metal coordination compounds of formula (1) (Ex. Comp. Nos. (I-1), (I-32) and (I-49)) for the thus-prepared luminescence devices was subjected to measurement of photoluminescence spectrum in order to evaluate a luminescent characteristic of the metal coordination compounds of formula (1) (Ex. Comp. Nos. (I-1), (I-32) and (I-49)). Specifically, each of the metal coordination compounds was dissolved in toluene at a concentration of 10^{-4} mol/l and subjected to measurement of photoluminescence spectrum at 25 °C by using excited light (ca. 350 nm) and a spectrophoto-fluorometer ("Model F4500", mfd. by Hitachi K.K.).

The results are shown in Table 17 appearing hereinafter.

The values of photoluminescence spectrum of the metal coordination compounds (Ex. Comp. Nos. (I-1), (I-32) and (I-49)) were substantially equivalent to those in the luminescence devices under voltage application as shown in Table 17, whereby it was confirmed that luminescence caused by the luminescence device was based on luminescence of the metal coordination compound used.

EL characteristics of the luminescence devices using the metal coordination compounds of formula (1) (Ex. Comp. Nos. (I-1), (I-32) and (I-49)) were measured by using a microammeter ("Model 4140B", mfd. by Hewlett-Packard Co.) for a current density under application of a voltage of 12 volts (current-voltage characteristic), using a spectrophotofluorometer ("Model SR1", mfd. by Topcon K.K.) for a peak emission wavelength λ_{PE} (luminescence spectrum), and using a luminance meter ("Model BM7", mfd. by Topcon K.K.) for a luminescence efficiency (luminescence luminance). Further, an energy conversion efficiency was obtained according to the following equation:


$$\begin{aligned} &\text{Energy conversion efficiency (lm/W)} \\ &= (\pi \times \text{luminescence efficiency} \\ &\quad (\text{cd/A}))/\text{applied voltage (V)}. \end{aligned}$$

All the above-prepared luminescence devices showed a good rectification characteristic.

The results are shown in Table 17.

Comparative Example I-2

A comparative luminescence device was prepared and evaluated in the same manner as in Example I-2 - I-13 except that the metal coordination compound of formula (1) was changed to Ir-phenylpyrimidine complex (Ir(ppy)₃) shown below.

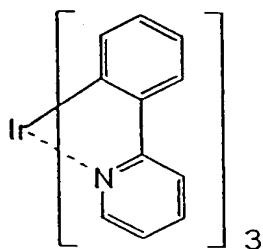

The results are shown in Table 17 below.

Table 17


Ex.No	Ex.Comp.No.	λ PE in toluene (nm)	λ PE (nm)	Energy conversion efficiency (lm/W)	Luminescence efficiency (cd/A)	Current density (mA/cm ² at 12V)	Luminance half-life (Hr)
I-11	(I-1)	522	525	4.0	13.6	170	300
I-12	(I-32)	487	525	0.4	2.4	130	400
I-13	(I-49)	537	545	2.1	7.0	25	250
Comp.Ex.I-2	Ir(ppy) ₃	510	510	6.0	19.0	20	150

As shown in Table 17, compared with the luminescence device using Ir(ppy)_3 (Comparative Example I-2) showing $\lambda_{\text{PE}} = 510 \text{ nm}$, the luminescence devices using the metal coordination compound of formula (1) according to the present invention showed longer peak emission wavelengths ($\lambda_{\text{PE}} = 525 - 545 \text{ nm}$) by 15 - 35 nm, thus resulting in smaller relative luminous efficiencies.

Smaller energy conversion efficiencies (0.4 - 4.0 lm/W) and luminescence efficiencies (2.4 - 13.6 cd/A) of the luminescence devices of the present invention compared with those (6.0 lm/W and 19.0 cd/A) of the luminescence device using Ir(ppy)_3 may be attributable to the smaller relative luminous efficiencies due to the longer peak emission wavelengths, thus not resulting in essentially inferior luminescent characteristics of the luminescence devices using the metal coordination compound of formula (1) of the present invention.

As apparent from the results of the luminance half-lives of the luminescence devices, compared with the luminescence device using Ir(ppy)_3 showing the luminance half-life of 150 hours, the luminescence devices using the metal coordination compounds of formula (1) according to the present invention showed considerably longer luminance half-lives of 250 - 400 hours.


Example I-14 (Synthesis of Ex. Comp. No. (I-1))

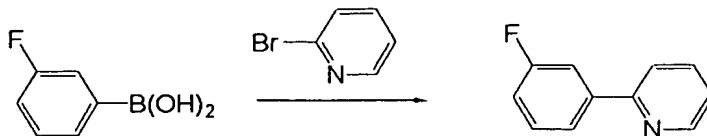

5

In a 1 liter-three necked flask, 20.0 g (126.6 mM) of 2-bromopyridine, 17.7 g (126.4 mM) of 3-fluorophenylboronic acid, 130 ml of toluene, 65 ml of ethanol and 130 ml of 2M-sodium carbonate aqueous solution were placed and stirred in a nitrogen gas stream at room temperature. Under stirring, to the mixture, 4.60 g (3.98 mM) of tetrakis (triphenylphosphine) palladium (0) was added, followed by heat-refluxing for 6 hours under stirring in nitrogen gas stream.

After the reaction, the reaction mixture was cooled, followed by extraction with cool water and toluene. The organic layer was washed with water until the system showed neutral, followed by distilling off of the solvent under reduced pressure to obtain a residue. The residue was purified by silica gel column chromatography (eluent: toluene/ethyl acetate = 5/1) to obtain 6.0 g of 2-(3-fluorophenyl)pyridine (pale brown liquid) (Yield: 34.6 %).

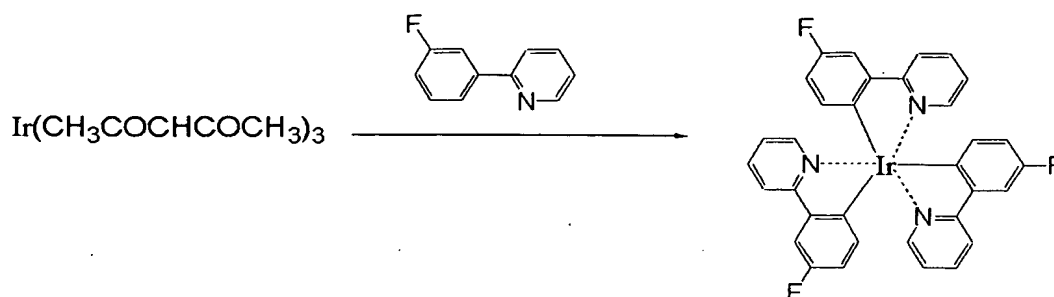

10 In a 100 ml-four necked flask, 50 ml of glycerol was placed and heat-stirred for 2 hours at 130 - 140 °C while supplying nitrogen gas therein in the form of bubbles, followed by cooling to 100 °C by standing. To glycerol, 1.04 g (6.00 mM) of 2-(3-fluorophenyl)pyridine and 0.50 g (1.02 mM) of Iridium (III) acetylacetonate were added, followed by heat-


15 refluxing for 10 hours under stirring in nitrogen gas stream.

After the reaction, the reaction mixture was cooled to room temperature and poured into 300 ml of 1N-HCl. The resultant precipitate was recovered by

20 filtration and washed with water, followed by drying for 5 hours at 100 °C under reduced pressure and purification by silica gel column chromatography (eluent: chloroform) to obtain 0.22 g of Iridium (III) tris[2-(3-fluorophenyl)pyridine] (yellow powder)

25 (Yield: 31.0 %).

Example I-15 (Synthesis of Ex. Comp. No. (I-32))

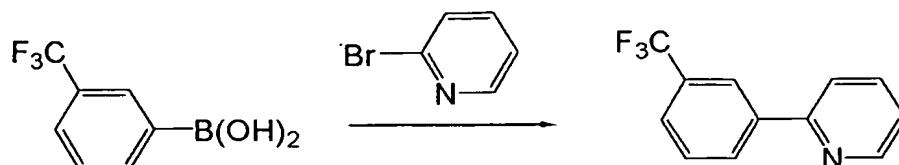


5

In a 1 liter-three necked flask, 20.8 g (131.6 mM) of 2-bromopyridine, 25.0 g (131.6 mM) of 3-trifluoromethylphenylboronic acid, 130 ml of toluene, 65 ml of ethanol and 130 ml of 2M-sodium carbonate aqueous solution were placed and stirred in a nitrogen gas stream at room temperature. Under stirring, to the mixture, 4.76 g (4.12 mM) of tetrakis (triphenylphosphine) palladium (0) was added, followed by heat-refluxing for 7 hours under stirring in nitrogen gas stream.

After the reaction, the reaction mixture was cooled, followed by extraction with cool water and toluene. The organic layer was washed with water until the system showed neutral, followed by distilling off of the solvent under reduced pressure to obtain a residue (pale brown liquid). The residue was purified by silica gel column chromatography (eluent: toluene/hexane = 1/1) to obtain 6.0 g of 2-(3-trifluoromethylphenyl)pyridine (pale brown liquid) (Yield: 21.1%).

09061075-092401
104250-54079650

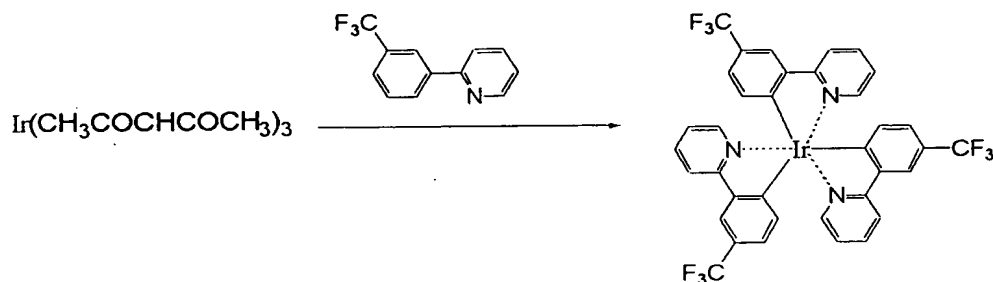


10 In a 200 ml-four necked flask, 100 ml of glycerol was placed and heat-stirred for 2 hours at 130 - 140 °C while supplying nitrogen gas therein in the form of bubbles, followed by cooling to 100 °C by standing. To glycerol, 2.68 g (12.0 mM) of 2-(3-trifluoromethylphenyl)pyridine and 1.00 g (2.04 mM) of Iridium (III) acetylacetonate were added, followed by heat-refluxing for 10 hours under stirring in nitrogen gas stream.

15 After the reaction, the reaction mixture was cooled to room temperature and poured into 600 ml of 1N-HCl. The resultant precipitate was recovered by filtration and washed with water, followed by drying for 5 hours at 100 °C under reduced pressure. The precipitate was dissolved in chloroform and the insoluble matter was removed by filtration, followed by purification by silica gel column chromatography (eluent: chloroform) and recrystallization from a mixture solvent (chloroform/methanol) to obtain 0.62 g of Iridium (III) tris[2-(3-trifluoromethylphenyl)-pyridine] (yellow powder) (Yield: 35.3 %), which

showed a peak emission wavelength λ_{PE} in toluene at 25 °C of 487 nm.

Example I-16 (Synthesis of Ex. Comp. No. (I-49))


5

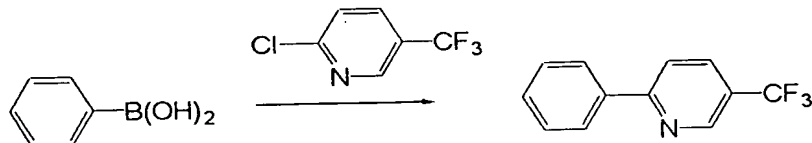

09061075.092104
10 In a 1 liter-three necked flask, 25.6 g
(141.0 mM) of 2-chloro-5-trifluoromethylpyridine, 17.2
g (141.0 mM) of phenylboronic acid, 140 ml of toluene,
70 ml of ethanol and 140 ml of 2M-sodium carbonate
aqueous solution were placed and stirred in a nitrogen
gas stream at room temperature. Under stirring, to
15 the mixture, 5.10 g (4.41 mM) of tetrakis (triphenyl-
phosphine) palladium (0) was added, followed by heat-
refluxing for 6 hours under stirring in nitrogen gas
stream.

20 After the reaction, the reaction mixture was
cooled, followed by extraction with cool water and
toluene. The organic layer was washed with water
until the system showed neutral, followed by
distilling off of the solvent under reduced pressure
to obtain a residue. The residue was purified by
25 silica gel column chromatography (eluent:
toluene/hexane = 5/1). The resultant creamy crystal
was purified by alumina column chromatography (eluent:


toluene) and recrystallized from ethanol to obtain 13.1 g of 2-phenyl-5-trifluoromethylpyridine (colorless crystal) (Yield: 41.6 %).

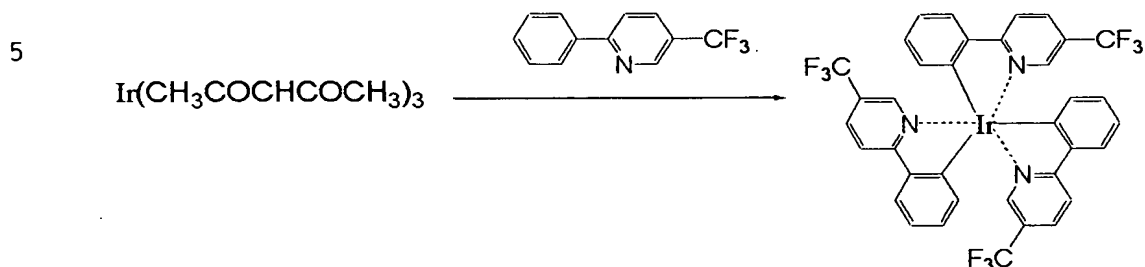

10 In a 200 ml-four necked flask, 100 ml of glycerol was placed and heat-stirred for 2 hours at 130 - 140 °C while supplying nitrogen gas therein in the form of bubbles, followed by cooling to 100 °C by standing. To glycerol, 2.68 g (12.0 mM) of 2-phenyl-5-trifluoromethylpyridine and 1.00 g (2.04 mM) of Iridium (III) acetylacetonate were added, followed by heat-refluxing for 8 hours under stirring in nitrogen gas stream.

20 After the reaction, the reaction mixture was cooled to room temperature and poured into 600 ml of 1N-HCl. The resultant precipitate was recovered by filtration and washed with water, followed by drying for 4 hours at 100 °C under reduced pressure and purification by silica gel column chromatography (eluent: chloroform) to obtain 0.43 g of Iridium (III) tris-(2-phenyl-5-trifluoromethylpyridine) (orange powder) (Yield: 24.5 %).

Example I-17 (Synthesis of Ex. Comp. No. (I-122))

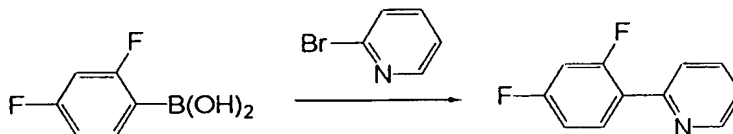


5

09561075-092404
T07460-2079550

In a 100 ml-three necked flask, 3.16 g (19.9 mM) of 2-bromopyridine, 3.16 g (20.0 mM) of 2,4-difluorophenylboronic acid, 15 ml of toluene, 7.5 ml of ethanol and 15 ml of 2M-sodium carbonate aqueous solution were placed and stirred in a nitrogen gas stream at room temperature. Under stirring, to the mixture, 0.72 g (0.62 mM) of tetrakis (triphenylphosphine) palladium (0) was added, followed by heat-refluxing for 8 hours and 40 minutes under stirring in nitrogen gas stream.

After the reaction, the reaction mixture was cooled, followed by extraction with cool water and ethyl acetate. The organic layer was washed with water followed by distilling off of the solvent under reduced pressure to obtain a residue. The residue was purified by silica gel column chromatography (eluent: toluene/ethyl acetate = 10/1) to obtain 3.28 g of 2-(2,4-difluorophenyl)pyridine (pale yellow oily product) (Yield: 86.0 %).

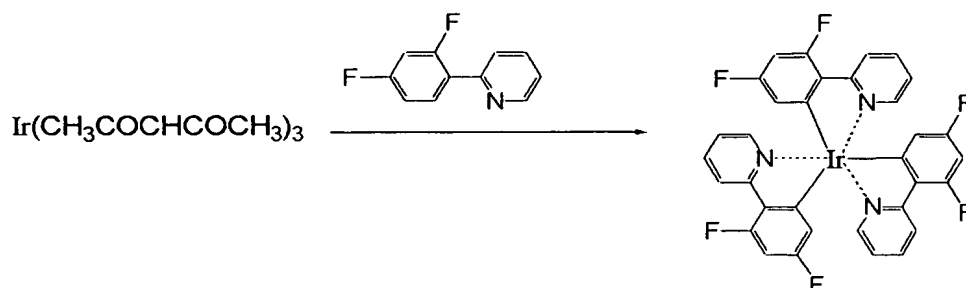


0961075-02104
F04250-5407960

In a 100 ml-four necked flask, 50 ml of glycerol was placed and heat-stirred for 2 hours at 130 - 140 °C while supplying nitrogen gas therein in the form of bubbles, followed by cooling to 100 °C by standing. To glycerol, 0.96 g (5.02 mM) of 2-(2,4-difluorophenyl)pyridine and 0.50 g (1.02 mM) of Iridium (III) acetylacetonate were added, followed by heat-refluxing for 10 hours under stirring in nitrogen gas stream.

After the reaction, the reaction mixture was cooled to room temperature and poured into 300 ml of 1N-HCl. The resultant precipitate was recovered by filtration and washed with water, followed by drying for 5 hours at 100 °C under reduced pressure and purification by silica gel column chromatography (eluent: chloroform) and recrystallization from a mixture solvent (chloroform/methanol) to obtain 0.25 g of Iridium (III) tris[2-(4,6-difluorophenyl)-pyridine] (yellow powder) (Yield: 32.1 %), which showed a peak emission wavelength λ_{PE} in toluene at

25 °C of 471 nm.

Example I-18 (Synthesis of Ex. Comp. No. (I-121))

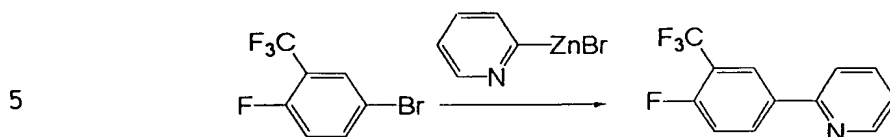


3306107E.002404
For 250 mg of 5-bromo-2-fluorobenzotrifluoride

In a 500 ml-three necked flask, 11.0 g (45.3 mM) of 5-bromo-2-fluorobenzotrifluoride and 90 ml of dry tetrahydrofuran (THF) were placed and stirred in a nitrogen gas stream at room temperature. Under stirring, to the mixture, 2.60 g (2.25 mM) of tetrakis(triphenylphosphine) palladium (0) was added, followed by cooling to 20 - 21 °C (inner temperature) on an ice bath in nitrogen gas stream. At that temperature, 90 ml of 0.5 M-THF solution of 2-pyridylzinc bromide was gradually added dropwise to the mixture in nitrogen gas stream, followed by stirring for 4 hours at that temperature.

20 After the reaction, the reaction mixture was poured into cool water, followed by addition of ethyl acetate to remove the insoluble matter by filtration. The organic layer was washed with water and dried with anhydrous sodium sulfate, followed by distilling-off of the solvent under reduced pressure to obtain a residue.

The residue was purified by silica gel column

chromatography (eluent: hexane/ethyl acetate = 20/1) to obtain 1.80 g of 2-(4-fluoro-3-trifluoromethylphenyl)pyridine (pale brown oily product) (Yield: 16.6 %).

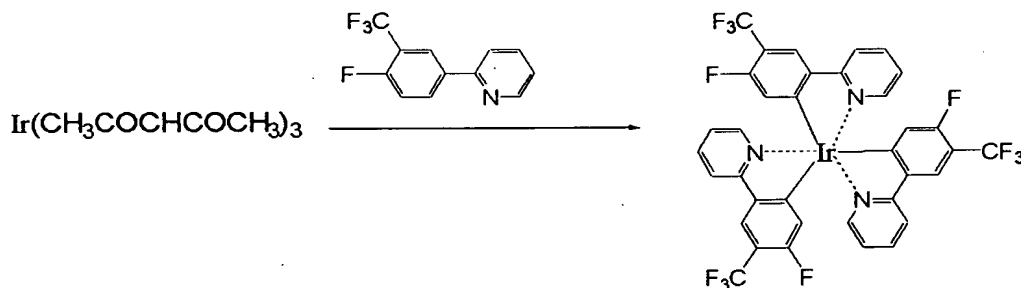


In a 100 ml-four necked flask, 50 ml of glycerol was placed and heat-stirred for 2 hours at 130 - 140 °C while supplying nitrogen gas therein in the form of bubbles, followed by cooling to 100 °C by standing. To glycerol, 1.21 g (5.02 mM) of 2-(4-fluoro-3-trifluoromethylphenyl)pyridine and 0.50 g (1.02 mM) of Iridium (III) acetylacetonate were added, followed by heat-refluxing for 10 hours under stirring in nitrogen gas stream.

20 After the reaction, the reaction mixture was cooled to room temperature and poured into 300 ml of 1N-HCl. The resultant precipitate was recovered by filtration and washed with water, followed by drying for 5 hours at 100 °C under reduced pressure and purification by silica gel column chromatography (eluent: chloroform) and recrystallization from a mixture solvent (chloroform/methanol) to obtain 0.20

g of Iridium (III) tris[2-(4-fluoro-5-trifluoromethyl-phenyl)pyridine] (yellow powder) (Yield: 21.5 %), which showed a peak emission wavelength λ_{PE} in toluene at 25 °C of 466 nm.

5 Example I-19 (Synthesis of Ex. Comp. No. (I-111))

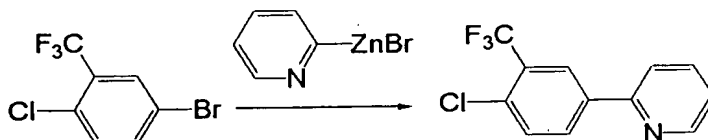


10

In a 500 ml-three necked flask, 11.8 g (45.5 mM) of 5-bromo-2-chlorobenzotrifluoride and 90 ml of dry tetrahydrofuran (THF) were placed and stirred in a nitrogen gas stream at room temperature. Under stirring, to the mixture, 2.60 g (2.25 mM) of tetrakis(triphenylphosphine) palladium (0) was added, followed by cooling to 13.5 - 14 °C (inner temperature) on an ice bath in nitrogen gas stream. At that temperature, 90 ml of 0.5 M-THF solution of 2-pyridylzinc bromide was gradually added dropwise to the mixture in nitrogen gas stream, followed by stirring for 3 hours at ca. 20 °C. .

After the reaction, the reaction mixture was poured into cool water, followed by addition of ethyl acetate to remove the insoluble matter by filtration. The organic layer was washed with water and dried with anhydrous sodium sulfate, followed by distilling-off

of the solvent under reduced pressure to obtain a residue. The residue was purified by silica gel column chromatography (eluent: hexane/ethyl acetate = 10/1) to obtain 3.70 g of 2-(4-chloro-5-trifluoro-

5 methylphenyl)pyridine (pale brown oily product)
(Yield: 31.9 %).

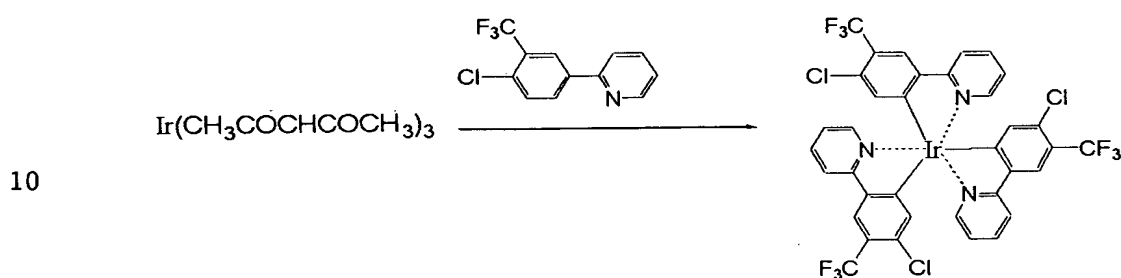

In a 100 ml-four necked flask, 50 ml of glycerol was placed and heat-stirred for 2 hours at 130 - 140 °C while supplying nitrogen gas therein in the form of bubbles, followed by cooling to 100 °C by standing. To glycerol, 1.29 g (5.01 mM) of 2-(4-chloro-3-trifluoromethylphenyl)pyridine and 0.50 g (1.02 mM) of Iridium (III) acetylacetonate were added,

15 followed by heat-refluxing for 8 hours under stirring in nitrogen gas stream.

After the reaction, the reaction mixture was cooled to room temperature and poured into 300 ml of 1N-HCl. The resultant precipitate was recovered by

25 filtration and washed with water, followed by drying for 5 hours at 100 °C under reduced pressure and purification by silica gel column chromatography

(eluent: chloroform) and recrystallization from a mixture solvent (chloroform/hexane) to obtain 0.25 g of Iridium (III) tris[2-(4-chloro-3-trifluoromethylphenyl)pyridine] (yellow powder)

5 (Yield: 25.4 %), which showed a peak emission wavelength λ_{PE} in toluene at 25 °C of 479 nm.

Comparative Example I-3 (Synthesis of metal coordination compound A)

10 A metal coordination compound A (iridium (III) tris[2-(4,5-difluoromethylphenyl)pyridine described in Polymer Preprints, 41(1), pp. 770 - 771 (2000)) was prepared in the same manner as in Example 17 except that 2,4-difluorophenylbronic acid was changed to 3,4-difluorophenylbronic acid.

15 The metal coordination compound A showed a peak emission wavelength λ_{PE} in toluene at 25 °C of 505 nm.

Example I-20 and Comparative Example I-4

20 Two luminescence devices were prepared and evaluated in the same manner as in Examples I-1 to I-10 except that the metal coordination compound was changed to one (Ex. Comp. No. (122)) prepared in Example I-18 (for Example I-20) and the metal coordination compound A prepared in Comparative
25 Example 3 (for Comparative Example 4), respectively.

The results are shown in Table 18 below.

09561075.032404

Table 18

Ex. No.	Ex. Comp. No.	Luminance half-life (Hr)
I-20	(I-122)	630
Comp.Ex. I-4	Metal coordination compound A	310

As apparent from Table 18, the luminescence device using the metal coordination compound of formula (1) according to the present invention exhibited a luminance half-life considerably longer than that of the luminescence device using the metal coordination compound A, thus resulting in an EL device excellent in durability (luminance stability).

As described hereinabove, the metal coordination compound of formula (1) according to the present invention provides a higher phosphorescence efficiency and a shorter phosphorescence life and allows control of its emission wavelength by appropriately modifying the substituents X1 to X8, thus being suitable as a luminescent material for EL device.

The result EL device (luminescence device) having an organic layer containing the metal coordination compound of formula (1) exhibits excellent characteristics including a high efficiency luminescence, a high luminance for a long period, and

a decreased luminescence deterioration in energized state.

Examples II-1 - II-15

In these examples, metal coordination
5 compounds of formula (1) (Ex. Comp. Nos. (II-10),
(II-15), (II-17), (II-21), (II-39), (II-43), (II-46),
(II-85), (II-96), (II-122), (II-131), (II-146), (II-
163), (II-177) and (II-182) were used in respective
luminescence layers for Examples II-1 - II-15,
10 respectively.

Each of luminescence devices having a
structure shown in Figure 1B were prepared in the
following manner.

On a glass substrate (transparent substrate
15 15), a 100 nm-thick film (transparent electrode 14) of
ITO (indium tin oxide) was formed by sputtering,
followed by patterning to have an (opposing) electrode
area of 3 mm².

On the ITO-formed substrate, three organic
20 layers and two metal electrode layers shown below were
successively formed by vacuum (vapor) deposition using
resistance heating in a vacuum chamber (10⁻⁴ Pa).

Organic layer 1 (hole transport layer 13) (40
nm): α -NPD

25 Organic layer 2 (luminescence layer 12) (20
nm): mixture of CBP: metal coordination compound of
formula (2) (95:5 by weight)

05061075-092401

```
5           Metal electrode layer 2 (metal electrode 11)
           (100 nm): Al
```

Each of the thus-prepared luminescence devices was taken out of the vacuum chamber and was subjected to a continuous energization test in an atmosphere of dry nitrogen gas stream so as to remove device deterioration factors, such as oxygen and moisture (water content).


The continuous energization test was performed by continuously applying a voltage at a constant current density of 70 mA/cm² to the luminescence device having the ITO (transparent) electrode (as an anode) and the Al (metal) electrode (as a cathode), followed by measurement of luminance (brightness) with time so as to determine a time (luminance half-life) required for decreasing an initial luminance (60 - 220 cd/m²) to 1/2 thereof.

The results are shown in Table 19 appearing hereinafter.

Comparative Example II-1

25 A comparative luminescence device was
prepared and evaluated in the same manner as in
Example II-1 - II-15 except that the metal

coordination compound of formula (2) was changed to
Ir-phenylpyrimidine complex (Ir(ppy)₃) shown below.

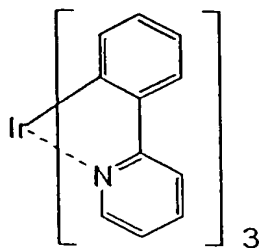

The results are shown in Table 19 below.

Table 19

Ex. No.	Ex.Comp. No.	Luminance half-life (Hr)
5	II-1	(II-10) 750
	II-2	(II-15) 950
	II-3	(II-17) 800
	II-4	(II-21) 850
	II-5	(II-39) 900
10	II-6	(II-43) 750
	II-7	(II-46) 900
	II-8	(II-85) 500
	II-9	(II-96) 650
	II-10	(II-122) 650
15	II-11	(II-131) 600
	II-12	(II-146) 550
	II-13	(II-163) 600
	II-14	(II-177) 450
	II-15	(II-182) 450
20	Comp.Ex. II-1	Ir(ppy) ₃ 350

As is apparent from Table 19, compared with the conventional luminescence device using Ir(ppy)₃, the luminescence devices using the metal coordination compounds of formula (2) according to the present invention provide longer luminance half-lives, thus

resulting in an EL device having a high durability (luminance stability) based on a good stability of the metal coordination compound of formula (2) of the present invention.

5 Examples II-16 - II-17

 In these examples, metal coordination compounds of formula (2) (Ex. Comp. Nos. II-15 and II-17 were used in respective luminescence layers for Examples II-16 - II-17, respectively.

10 Each of luminescence devices having a structure shown in Figure 1C were prepared in the following manner.

 On a glass substrate (transparent substrate 15), a 100 nm-thick film (transparent electrode 14) of ITO (indium tin oxide) was formed by sputtering, followed by patterning to have an (opposing) electrode area of 3 mm².

 On the ITO-formed substrate, three organic layers and two metal electrode layers shown below were successively formed by vacuum (vapor) deposition using resistance heating in a vacuum chamber (10⁻⁴ Pa).

 Organic layer 1 (hole transport layer 13) (40 nm): α-NPD

 Organic layer 2 (luminescence layer 12) (20 nm): mixture of CBP: metal coordination compound of formula (2) (93:7 by weight)

 Organic layer 3 (exciton diffusion prevention

layer 17) (10 nm): BCP

Organic layer 4 (electron transport layer 16)
(30 nm): Alq3

Metal electrode layer 1 (metal electrode 11)
5 (15 nm): Al-Li alloy (Li = 1.8 wt. %)

Metal electrode layer 2 (metal electrode 11)
(100 nm): Al

Separately, each of the metal coordination
compounds of formula (2) (Ex. Comp. Nos. (II-15 and
10 (II-17))) for the thus-prepared luminescence devices
was subjected to measurement of photoluminescence
spectrum in order to evaluate a luminescent
characteristic of the metal coordination compounds of
formula (2) (Ex. Comp. Nos. (II-15) and (II-17)).
15 Specifically, each of the metal coordination compounds
was dissolved in toluene at a concentration of 10^{-4}
mol/l and subjected to measurement of photo-
luminescence spectrum at 25 °C by using excited
light (ca. 350 nm) and a spectrophoto-fluorometer
20 ("Model F4500", mfd. by Hitachi K.K.).

The results are shown in Table 20 appearing
hereinafter.

The values of photoluminescence spectrum of
the metal coordination compounds (Ex. Comp. Nos. (II-
25 15) and (II-17)) were substantially equivalent to
those in the luminescence devices under voltage
application as shown in Table 20, whereby it was

09361075.092404

confirmed that luminescence caused by the luminescence device was based on luminescence of the metal coordination compound used.

EL characteristics of the luminescence devices using the metal coordination compounds of formula (1) (Ex. Comp. Nos. (I-1), (I-32) and (I-49)) were measured by using a microammeter ("Model 4140B", mfd. by Hewlett-Packard Co.) for a current density under application of a voltage of 12 volts (current-voltage characteristic), using a spectrophotofluorometer ("Model SR1", mfd. by Topcon K.K.) for a peak emission wavelength λ_{PE} (luminescence spectrum), and using a luminance meter ("Model BM7", mfd. by Topcon K.K.) for a luminescence efficiency (luminescence luminance). Further, an energy conversion efficiency was obtained according to the following equation:

$$\begin{aligned} &\text{Energy conversion efficiency (lm/W)} \\ &= (\pi \times \text{luminescence efficiency} \\ &\quad (\text{cd/A}))/\text{applied voltage (V)}. \end{aligned}$$

All the above-prepared luminescence devices showed a good rectification characteristic.


The results are shown in Table 20.

Comparative Example II-2

A comparative luminescence device was prepared and evaluated in the same manner as in Example II-16 - II-17 except that the metal coordination compound of formula (1) was changed

05961075-092401

to Ir-phenylpyrimidine complex (Ir(ppy)₃) shown below.

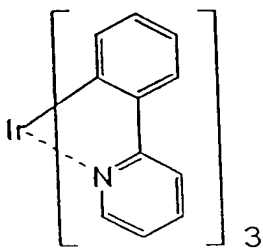

The results are shown in Table 20 below.

09561075-092401
FOI-2009-04079560

Table 20


Ex.No	Ex.Comp.No.	λ PE in toluene (nm)	λ PE (nm)	Energy conversion efficiency (lm/W)	Luminescence efficiency (cd/A)	Current density (mA/cm ² at 12V)	Luminance half-life (Hr)
II-16	(II-15)	524	565	0.9	7.5	70	250
II-17	(II-17)	554	565	3.4	9.6	180	300
Comp.Ex.II-2	Ir(ppy) ₃	510	510	6.0	19.0	20	150

As shown in Table 20, compared with the luminescence device using Ir(ppy)_3 (Comparative Example II-2) showing $\lambda_{\text{PE}} = 510 \text{ nm}$, the luminescence devices using the metal coordination compound of formula (2) according to the present invention showed longer peak emission wavelengths ($\lambda_{\text{PE}} = 565 \text{ nm}$) by 55 nm, thus resulting in smaller relative luminous efficiencies.

Smaller energy conversion efficiencies (0.9 - 3.4 lm/W) and luminescence efficiencies (7.5 - 9.6 cd/A) of the luminescence devices of the present invention compared with those (6.0 lm/W and 19.0 cd/A) of the luminescence device using Ir(ppy)_3 may be attributable to the smaller relative luminous efficiencies due to the longer peak emission wavelengths, thus not resulting in essentially inferior luminescent characteristics of the luminescence devices using the metal coordination compound of formula (2) of the present invention.

As apparent from the results of the luminance half-lives of the luminescence devices, compared with the luminescence device using Ir(ppy)_3 showing the luminance half-life of 150 hours, the luminescence devices using the metal coordination compounds of formula (2) according to the present invention showed considerably longer luminance half-lives of 250 - 300 hours.

Example II-18 (Synthesis of Ex. Comp. No. (II-15))

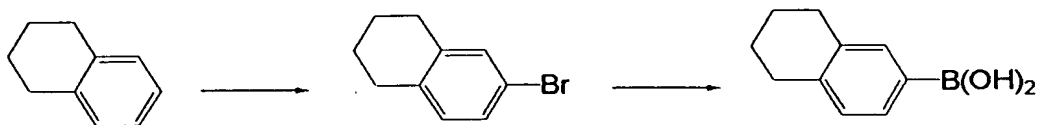


5

In a 5 liter-three necked flask, 169.5 g (1.28 M) of 1,2,3,4-tetrahydronaphthalene and 3 liters of acetic acid were placed and stirred at room temperature. Under stirring, to the mixture, 650 g (1.67 M) of benzyltrimethylammonium bromide and 244.8 g (1.80 M) of zinc chloride were successively added, followed by stirring for 5.5 hours at 70 °C. After the reaction, the reaction mixture was cooled to room temperature and poured into 3 liters of ice water, followed by extraction with methyl t-butyl ether. The organic layer was successively washed with 5 %-NaHSO₃ aqueous solution, 5 %-NaOH aqueous solution and distilled water, followed by distilling-off of the solvent under reduced pressure to obtain 243.2 g of a dark brown liquid. The liquid was subjected to vacuum distillation (distillation under reduced pressure) (boiling point = 108 - 110 °C at 667 Pa) to obtain 130.2 g of 6-bromo-1,2,3,4-tetrahydronaphthalene (Yield: 48.1 %).

In a 5 liter-three necked flask, 67.55 g of 6-bromo-1,2,3,4-tetrahydronaphthalene and 1480 ml of


dry tetrahydrofuran (THF) were placed and cooled to
-70 to -68 °C on a dry ice-acetone bath in a dry
nitrogen gas atmosphere. At that temperature, to the
mixture, 200 ml of 1.6 M-butyllithium solution in
5 hexane was added dropwise, followed by stirring for 2
hours at -67 °C or below. To borate in 435 ml of dry
THF was added dropwise at -70 to -68 °C, followed by
stirring for 2 hours at -67 °C or below. The reaction
mixture was gradually warmed to room temperature and
10 left standing overnight. The resultant reaction
mixture was gradually added dropwise to a mixture of
108 ml of HCl and 438 ml of water kept at 10 °C or
below, followed by stirring for 1 hour at that
temperature. Thereafter, the mixture was subjected to
15 extraction with toluene. The organic layer was washed
with water, followed by distilling-off of the solvent
under reduced pressure to obtain a residue. The
residue was purified by silica gel column
chromatography (eluent: toluene/ethyl acetate = 2/1)
20 and recrystallized from hexane to obtain 30.4 g of
1,2,3,4-tetrahydronaphthalene-6-boronic acid (Yield:
54.0 %).

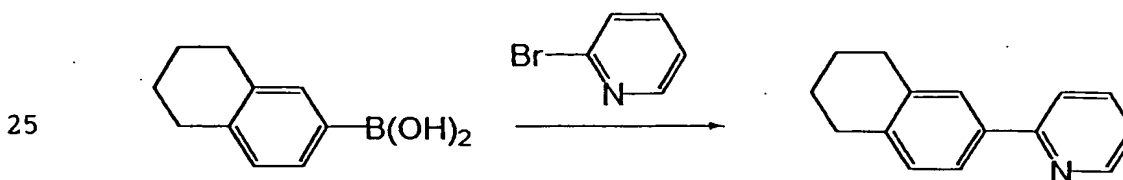

09561075-092401
104260-52073660

In a 1 liter-three necked flask, 17.8 g (114 mM) of 2-bromopyridine, 20.0 g (127 mM) of 1,2,3,4-tetrahydronaphthalene-6-bronic acid, 160 ml of toluene, 80 ml of ethanol and 160 ml of 2M-sodium carbonate aqueous solution were placed and stirred in a nitrogen gas stream at room temperature. Under stirring, to the mixture, 4.05 g (3.5 mM) of tetrakis (triphenylphosphine) palladium (0) was added, followed by heat-refluxing for 7 hours under stirring in nitrogen gas stream.

After the reaction, the reaction mixture was cooled, followed by extraction with cool water and toluene, and distilling off of the solvent under reduced pressure to obtain a residue. The residue was purified by silica gel column chromatography (eluent: toluene/hexane = 2/1) to obtain 9.2 g of 6-(pyridine-2-yl)-1,2,3,4-tetrahydronaphthalene (yellow liquid) (Yield: 38.6 %).

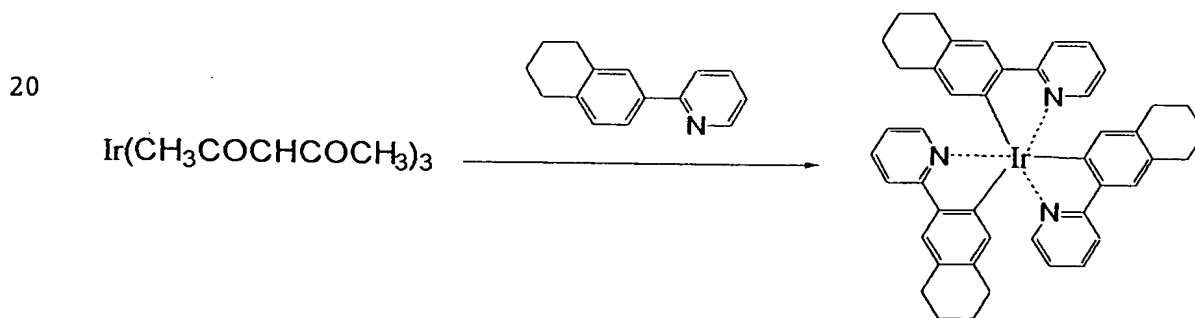


25

In a 100 ml-four necked flask, 50 ml of glycerol was placed and heat-stirred for 2 hours at

130 - 140 °C while supplying nitrogen gas therein in the form of bubbles, followed by cooling to 100 °C by standing. To glycerol, 1.30 g (6.21 mM) of 6-(pyridine-2-yl)-1,2,3,4-tetrahydronaphthalene and 0.50 g (1.02 mM) of Iridium (III) acetylacetonate were added, followed by heat-refluxing for 5 hours under stirring in nitrogen gas stream.

After the reaction, the reaction mixture was cooled to room temperature and poured into 100 ml of 1N-HCl. The resultant precipitate was recovered by filtration and washed with water, followed by washing with acetone and purification by silica gel column chromatography (eluent: chloroform) to obtain 0.14 g of Iridium (III) tris[6-(pyridine-2-yl)-1,2,3,4-tetrahydronaphthalene] (orange powder) (Yield: 16.8 %).


Example II-19 (Synthesis of Ex. Comp. No. (II-17))

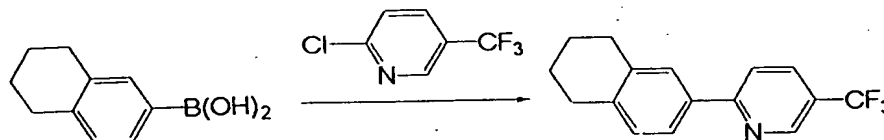

In a 200 ml-four necked flask, 5.16 g (28.4 mM) of 2-chloro-5-trifluoromethyl, 5.00 g (28.4 mM) of 1,2,3,4-tetrahydronaphthalene-6-boronic acid, 25 ml of toluene, 12.5 ml of ethanol and 25 ml of 2M-sodium

carbonate aqueous solution were placed and stirred in a nitrogen gas stream at room temperature. Under stirring, to the mixture, 1.02 g (0.88 mM) of tetrakis (triphenylphosphine) palladium (0) was added, followed by heat-refluxing for 3.25 hours under stirring in nitrogen gas stream.

After the reaction, the reaction mixture was cooled, followed by extraction with cool water and toluene, and distilling off of the solvent under reduced pressure to obtain a residue. The residue was purified by silica gel column chromatography (eluent: toluene/hexane = 1/1) and alumina column chromatography (eluent: toluene) and recrystallized from methanol to obtain 3.14 g of 6-(5-trifluoromethylpyridine-2-yl)-1,2,3,4-tetrahydronaphthalene (colorless crystal) (Yield: 39.9 %).

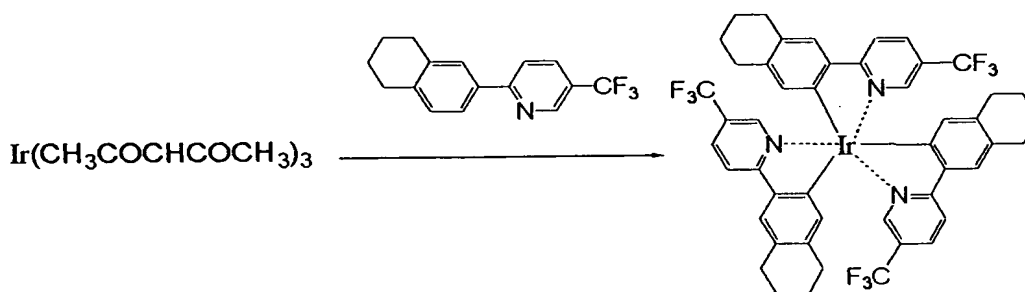

In a 100 ml-four necked flask, 50 ml of glycerol was placed and heat-stirred for 2 hours at 130 - 140 °C while supplying nitrogen gas therein in the form of bubbles, followed by cooling to 100 °C by

standing. To glycerol, 1.72 g (6.20 mM) of 6-(5-trifluoromethylpyridine-2-yl)-1,2,3,4-tetrahydronaphthalene and 0.50 g (1.02 mM) of Iridium (III) acetylacetonate were added, followed by heat-
5 refluxing for 7 hours under stirring in nitrogen gas stream.

After the reaction, the reaction mixture was cooled to room temperature and poured into 100 ml of 1N-HCl. The resultant precipitate was recovered by
10 filtration and washed with water, followed by washing with acetone and purification by silica gel column chromatography (eluent: chloroform) to obtain 0.11 g of Iridium (III) tris[6-(5-trifluoromethylpyridine-2-yl)-1,2,3,4-tetrahydronaphthalene] (orange powder)
15 (Yield: 10.5 %).

As described hereinabove, the metal coordination compound of formula (2) according to the present invention provides a higher phosphorescence efficiency and a shorter phosphorescence life and
20 allows control of its emission wavelength by appropriately modifying the alkylene group Y and/or substituents X1 and X2, thus being suitable as a luminescent material for EL device.

The result EL device (luminescence device)
25 having an organic layer containing the metal coordination compound of formula (2) exhibits excellent characteristics including a high efficiency

0961075.092404

luminescence, a high luminance for a long period, and a decreased luminescence deterioration in energized state.

5

10

15

20

25

Year	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100
1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	